



CATALOG
2026



TIRES DESIGNED FOR CHAMPIONS





NO WARRANTY POLICY

THE ANTI-PUNCTURE SPECIALIST

Hoosier Racing Tire Corp. offers racing tires for sale only upon the conditions and the terms contained in this disclaimer of liability and indemnity. Due to many varied and different conditions which Hoosier Racing Tires and Tubes are exposed and because of the manner in which racing is conducted, Hoosier Racing Tire Corp. makes absolutely no warranty, expressed or implied, as to the fitness for a general or particular purpose or of merchantability in connection with any offer of sale of Hoosier Racing Tires and tubes. **"HOOSIER RACING TIRES AND TUBES ARE SOLD AS IS."** Race tires are not tested or labeled to meet FMVSS 109, 119, 139 or ECE36 Safety Standards. Therefore it is dangerous and illegal to sell race tires for use on public highways. Any person selling Hoosier Racing Tires or Tubes for highway use agrees to indemnify and reimburse Hoosier Racing Tire Corp. for all loss, damage, or liability Hoosier Racing Tire Corp. may suffer because of such sales. Not applicable where prohibited by law. Not following these warnings can cause SERIOUS PERSONAL INJURY OR DEATH. For more information read tire labels, follow manufacturer's warnings as molded in tire sidewalls and visit hoosiertire.com.

FREEZE WARNING

Freeze Crack Advisory: This advisory addresses proper storage and use of Hoosier tires in cold conditions. Hoosier tires, especially asphalt and hard compound tires, may experience Rubber Cracking if the tires are transported, crushed, flexed or stressed when frozen. The following guidelines are provided to avoid this problem.

1. Always store Hoosier Racing Tires indoors at temperatures above 32° F.
2. If tires have been subject to 32° F or less, allow them to warm to room temperature (about 70° F) for a minimum of 24 hrs before the tire is mounted, transported or flexed.
3. Always use spare tires not intended for future competition to store vehicles for prolonged periods of time or winter transport.
4. If below freezing temperatures are expected, please consider shipping tires once more favorable conditions exist.

Do not use tires that have evidence of Freeze Crack Damage.

WARNING

Service Life for Race Tires: Old tires can fail in use, causing loss of vehicle control and personal injury. Environmental conditions like temperature extremes, exposure to sunlight, electric arc, solvents, automotive fluids, and atmospheric pollutants accelerate the aging process. Hoosier Racing Tire strongly recommends that new (sticker) tires should be put in service within 2 years of date of purchase. Used (scuffed) tires have a shorter service life than new (sticker) tires. Poor storage and infrequent use accelerate the aging process.

DIRECTION OF ROTATION/ MOUNTING INSTRUCTIONS

ROTATIONAL GUIDLINES FOR TIRES WITH DIRECTIONAL ARROWS

All Hoosier tires having directional arrows must be mounted so that the tire travels in the direction of the arrow. Hoosier tires having directional arrows will have them on both sidewalls. Directional arrows may not be on a tire that can have both left and/or right side application. All Hoosier tires not having directional arrows should be mounted as detailed below.

ROTATIONAL GUIDLINES FOR TIRES WITHOUT DIRECTIONAL ARROWS

Every Hoosier race tire has a four character serial code embossed into ONE sidewall of the tire. All Hoosier DOT tires will also have two additional codes as required by the Department of Transportation. (Example: J7AB 4AX8 3710)

CIRCLE TRACK RACING TIRES:

(Includes both dirt and asphalt tires)

Hoosier tires must be mounted with the serial code located toward the infield.

CIRCUIT & RALLY TIRES:

(Includes catalog numbers beginning with 43, 44, 45, 46)

In most cases, Hoosier tires used in Circuit & Rally applications should be mounted with the serial code toward the center of the vehicle. Once a tire has been run in the proper orientation it is acceptable to remount the tire in the opposite direction to even out the wear.

DRAG RACING TIRES, INCLUDING DOT DRAG TIRES:

(Includes catalog numbers beginning with 17, 18) Hoosier drag tires can be mounted to rotate in either direction. Hoosier drag tires can also be flipped or reversed to provide even wear.

DIRT BIKE TIRES:

FRONT TIRES – Mount serial code facing brake caliper.
REAR TIRES – Mount serial code facing sprocket side

WARNING – MOUNTING IS DANGEROUS

Special Tire Mounting Instructions: Tire mounting should be done only by trained personnel using proper tools and procedures. Failure to follow safe mounting procedures could cause faulty positioning of the tire and cause the assembly to burst with explosive force sufficient to cause serious PERSONAL injury or death. Always inspect tire for kinked beads or other possible damage that may have occurred in shipping or storage. Clean the rim especially in the bead area before mounting a tire. Lubricate the tire beads as needed with a purpose made tire mounting liquid or paste. Always lock rim on mounting machine or place in safety cage. Use a clip on chuck, an in-line valve with a pressure gauge or adjustable regulator and remote inflation/deflation device. Have enough air hose to stay out of the trajectory. **Stand back.**

WARNING – VERIFY RIM SIZE

Verify Correct Wheel and Bead Flange: All tires are designed to be used on wheels that are manufactured to Tire and Rim Association (T&RA) specifications and tolerances. Some rims are non-standard or damaged and it is necessary to inspect the rim flange to assure proper fit. Consult your specific rim manufacturer to determine if your rim can be used in this application. Never attempt to install and inflate a tire of one bead diameter on a rim or wheel of a different bead diameter. Use of Hoosier Racing Tires on wheels with incorrect bead flanges or wheels that do not meet T&RA standards can cause the assembly to fail and burst with explosive force sufficient to cause serious personal injury or death. Use a certified wheel rim disk tape to confirm wheel rim flange size.

WARNING – BEAD/RIM SEATING

When seating beads never exceed maximum bead seating pressure as molded in tire sidewall. Never exceed manufacturer's maximum inflation pressure. Always seat beads with wheel locked to mounting machine or placed in a safety cage. A damaged tire or wheel can fail during bead seating and burst with enough force sufficient to cause SERIOUS PERSONAL INJURY OR DEATH. Always use a clip on chuck, an in-line valve with a pressure gauge or adjustable regulator and remote inflation/deflation device. Have enough air hose to stay out of the trajectory. Stand back. If the beads will not seat at the manufacturers maximum bead seating pressure, STOP, deflate tire, return the tire to the place of purchase.

WARNING – NOT FOR HIGHWAY USE

NOT FOR HIGHWAY USE: All Hoosier Racing Tires including DOT-labeled NOT INTENDED FOR HIGHWAY USE are designed for racing purposes only on specified racing surfaces and are not to be operated on public roadways. DOT-labeled Hoosier Racing Tires meet Department of Transportation requirements for marking and performance only and are NOT INTENDED FOR HIGHWAY USE. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing Tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and SERIOUS PERSONAL INJURY OR DEATH. **Exception-** "PRO STREET", "TRACK ATTACK PRO" and "EXTREME CONTACT FORCE" tires which are fully street legal.

WARNING – MISUSE/MISAPPLICATION

Application/Misuse: All Hoosier Racing Tire products are designed for a specific purpose. Consult with Hoosier Racing Tire Corp. for specific fitment and application. Utilizing Hoosier Tires in any form outside of their intended use constitutes misuse of the product and can cause SERIOUS PERSONAL injury or death. Hoosier Racing Tire products are designed and manufactured for racing purposes only, within a closed course designed for organized competition. Not for recreational use. Hoosier Tires should never be used for Off Track Exhibition or for Land Speed Record Vehicles including Jet or Rocket Powered Cars.

WARNING – DO NOT ALTER TIRES

Chemical Treatment of Tires: Hoosier Racing Tire strictly forbids any chemical alteration of the tire carcass and/or tread compound such as tire "soaking" or use of tread "softener." Hoosier Racing Tire strictly forbids the physical defacement (removal, altering or covering), of tire sidewall markings in any manner. Failure to comply with this warning could result in premature or catastrophic tire failure and may result in serious personal injury or death. Utilizing Hoosier Tires in any form outside of their intended use constitutes misuse of the product and can cause SERIOUS PERSONAL injury or death. Hoosier Racing Tire products are designed and manufactured for racing purposes only, within a closed course designed for organized competition. Not for recreational use. Hoosier Tires should never be used for Off Track Exhibition or for Land Speed Record Vehicles including Jet or Rocket Powered Cars.

CONTENTS

**NO WARRANTY POLICY
& WARNINGS 04-05**

ASPHALT OVAL 08-13

DIRT OVAL 14-19

**KARTING
QUARTER MIDGET 20-25**

DRAG RACING 26-31

CIRCUIT RACING 32-43

PERFORMANCE STREET 44-51

RALLY 52-55

OFF ROAD 56-59

**HOOSIER MOMMA
HOOSIER DADDY 60-61**

APPAREL 62-63

ASPHALT OVAL



LITTLE CAR ASPHALT / MINI-CUP

MIDGET ASPHALT

ASPHALT SHORT TRACK

SPOTLIGHT: GENERAL TIRE / ARCA

MODIFIED / SUPERS / SPRINT ASPHALT

09
09
10-11
12
13

LITTLE CAR ASPHALT / MINI-CUP

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
41100	6/18-10	SLICK	6"	18"	56"-57"	6"-7"	7"	8.5"	LC0
41120	8/18-10	SLICK	8"	18"	56"-57"	7"-8"	8"	9.8"	LC3
41130	10/19-10	SLICK	10"	19"	60"	10"	10"	12.2"	LC5
MINI-CUP									
41149	15/7-8 SH	SLICK	6.25"	15.37"	48.25"	7"-8"	8"	7.5"	MC780
41150	15/7-8	SLICK	6.25"	15.75"	49.5"	7"-8"	8"	7.5"	MC780



MIDGET ASPHALT

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
13109	7/20.5-13	SLICK	7"	20.5"	65"	8"	8"	8.6"	MG4
13110	7/20.5-13	SLICK	7"	20.5"	66"	8"	8"	8.6"	700, MG5
13115BG06	7/20.5-13 BG2006	SLICK	7"	20.5"	65"	8"	8"	8.6"	BG2006
13195	10/22-13	SLICK	9"	22"	69"	8"	8"	11.2"	MG5
13210	10/23.5-13	SLICK	10"	23.5"	73"	10"	10"	11.6"	760
13240	12/23.5-13	SLICK	12"	23.5"	74"	10"-12"	10"	13.5"	700



SLICK

ASPHALT SHORT TRACK

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
08651	27/10-15	SLICK	10"	27.5"	86"	10"	10"	13.2"	1057
10050	8/23-13	SLICK	8"	23.5"	73.8"	8"	8"	10.2"	F60
10051	8/23-13 SH	SLICK	8"	23"	72.5"	8"	8"	10.2"	F60
10060	22.5/7-13	STREET TREAD	7"	22.5"	70.7"	6"	6"	8.6"	Sportsman
10070	23/7-13	STREET TREAD	7"	23"	72.2"	6"	6"	8.6"	Sportsman, Super TD
10100	22.5/8-13	RIB ASPHALT	8"	22.5"	70.7"	8"	8"	9.8"	700
10110	23/8-13	RIB ASPHALT	8"	23"	72.2"	8"	8"	9.8"	700
10160	10/27-15 SH	SLICK	10"	27"	84.8"	10"	10"	13.2"	1070
10170	10/27-15	SLICK	10"	27.5"	86"	10"	10"	13.2"	1070
10171	10/27-15	SLICK	10"	27.5"	86"	10"	10"	13.2"	1070
10180	26.5x8-15	SLICK	8"	26.8"	84"	8"	8"	11.5"	F70
10181	8/26.5-15	SLICK	8"	27.3"	86"	8"	8"	11.4"	F60
10183	8/2-15	SLICK	8"	27.3"	86"	8"	8"	11.4"	F70, F75
10184	8/27.5-15	SLICK	8"	27.3"	86"	8"	8"	11.4"	F70
10190	26.5X9-15	SLICK	9"	26.5"	84"	10"	10"	12.5"	980
10193	27X9-15	SLICK	9"	26.5"	86.5"	10"	10"	12.75"	980
10205	26.5/8-15	STREET TREAD	8"	26.5"	82.1"	8"	8"	10.2"	890
10208	27.5/8-15	STREET TREAD	8"	27.5"	85.3"	8"	8"	10.7"	890
10215	26.5/8-15	STREET TREAD	8"	26.5"	81.25"	8"	8"	10.2"	COMANCHE
10220	26.5/8-15	STREET TREAD	8"	26.5"	82.1"	8"	8"	10.2"	COMANCHE, 880, 895
10230	27.5/8-15	STREET TREAD	8"	27.5"	85.3"	8"	8"	10.7"	COMANCHE
10240	23/7-13 RIB	RIB ASPHALT	6.6"	22.75"	71.5"	7"	7"	9.3"	800
10245	23.5/7-13 RIB	RIB ASPHALT	6.6"	23.2"	73"	7"	7"	9.1"	800
10280	26.5/8-15 RIB	RIB ASPHALT	8"	26.5"	82"	8"	8"	10.75"	800
10285	27/8-15 RIB	RIB ASPHALT	8"	27"	84.5"	8"	8"	11.25"	700, 800
10290	27.5/8-15 RIB	RIB ASPHALT	8"	27.5"	85.5"	8"	8"	11.25"	700, 800
10295	8/26.5-15	STREET TREAD	9"	26.5"	83.2"	8"	8"	11"	970
10300	8/26.5-15	STREET TREAD	9"	27"	84"	8"	8"	11"	970
10350	8/27-15	STREET TREAD	9"	27.5"	86.3"	8"	8"	11"	970
10400	23/7-14	STREET TREAD	7"	23"	72.2"	6"	6"	8.6"	790
10405	23/7-14	STREET TREAD	7"	23"	72.2"	6"	6"	8.6"	790
10406	23/7-14	STREET TREAD	7"	23"	72.2"	6"	6"	8.6"	795
10408	24/7-14	STREET TREAD	7"	24"	75"	6"	6"	9.1"	790
10409	24x7-14	STREET TREAD	7"	24"	75"	6"	6"	9.1"	795
10410	26.5/7-15	STREET TREAD	7"	26.4"	83"	6"	6"	9.1"	790
10414	27/7-15	STREET TREAD	7"	26.5"	84"	6"	6"	9.2"	790, 850
10420	26.5/8-15	STREET TREAD	8"	26.5"	82.1"	8"	8"	10.2"	880
10425	27.5x8-15	STREET TREAD	8"	27.5"	85.3"	8"	8"	10.7"	880
10430	8/26.5-15	STREET TREAD	8.5"	26.4"	83"	8"	8"	11.4"	D800
10435	8/26.5-15	STREET TREAD	8.5"	26.9"	84.5"	8"	8"	11.4"	D800
10440	8/27-15	STREET TREAD	8.5"	27.2"	85.5"	8"	8"	11.4"	D800
10620	27.5/10-15	SLICK	10"	27.3"	86.5"	10"	10"	13.2"	F50
10700	27/10-15 SX	SLICK	10"	26.8"	84"	10"	10"	13.2"	3035
10710	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	3035
10720	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	3045

SLICK



STREET TREAD



RIB ASPHALT



SLICK



ASPHALT SHORT TRACK (CONTINUED)

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
37130	8/27-15	SLICK	8"	27.3"	86"	8"	8"	11.4"	F53
37140	8/27-15	SLICK	8"	27.3"	86"	8"	8"	11.4"	F53
37170	10/23-13	SLICK	10"	23"	72"	10"	10"	12.5"	F25, F45
10811	27/10-15 SH	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST1*
10820	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST1
10821	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST1, ST1*
10840	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST2, ST3
10841	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST3
10842	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST2*, ST3*
10845	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST3
10851	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	ST2*
10910	27/10-15	SLICK	10"	26.8"	84"	10"	10"	13.2"	F45*

SOFT		COMPOUND												FIRM		
	F15			795	ST1*		500	F45	ST2*	600		970	F80	800	850	
				950	SUPER TD		F60	F53	960			1070	R750	ST3*	COMANCHE	
					D850		1057	2040				700	F70	F55	790	
												880	D800		ST TD	
												980				
												F75				
												D800				



GENERAL TIRE



OFFICIAL TIRE

Proudly Manufactured By  HOOSIER

MODIFIED / SUPERS / SPRINT ASPHALT

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
08400	26/13-15	SLICK	13"	25.5"	80.5"	14"-15"	15"	16.4"	M20, M30
08410	26/13-15	SLICK	13"	26"	81.5"	14"-15"	15"	16.4"	M20, M30
08420	27/13-15	SLICK	13"	26.8"	84"	15"	15"	16.4"	M30, M45, M450
09120	11/24-15	SLICK	11"	23.2"	73"	10"	10"	13"	2010
09121	11/24-15	SLICK	12"	24.1"	75.75"	12"	12"	13"	2030
09125	11/24.5-15	SLICK	11"	24.5"	77.5"	10"	10"	12.5"	M60
09142	13/25-15	SLICK	13"	25"	78"	13"-14"	13"	15"	2045
09150	26/13-15	SLICK	13"	26"	81.5"	14"-15"	15"	16.4"	2040
09160	13/26.5-15	SLICK	13"	26.4"	82.5"	15"	15"	16.4"	2040
09170	13/27-15	SLICK	13"	27"	84.2"	15"	15"	16.4"	2045
09200	17/28-15	SLICK	17"	27.7"	86.5"	18"	18"	20"	2045
09206	17/28-15	SLICK	17"	27.7"	86.5"	18"	18"	20"	M40
09209	17/28-15 (SC1)	SLICK	17"	27.7"	86.5"	18"	18"	20"	M55

SOFT	COMPOUND								FIRM
M10		M20	M30	2040	M45	M450	M55	M60	
2010		1320	2030		2045				
			1330		M40				

**“YOU CAN HAVE THE BEST CAR,
BUT WITHOUT GOOD TIRES,
YOU’RE NOWHERE.”**

- Henry Ford



DIRT OVAL

LATE MODEL / E-MOD / STREET STOCK DIRT

EASTERN MODIFIED / 358 / SPORTSMAN DIRT

WING SPRINT DIRT

NON-WING SPRINT DIRT / SILVER CROWN SHORT TRACK DIRT

SILVER CROWN DIRT / MILE TRACKS

MIDGET DIRT / MINI SPRINT / TQ MIDGET

MODIFIED MIDGET / MICRO SPRINT DIRT / JR. SPRINT

15
16
16
17
17
18
18



LATE MODEL / E-MOD / STREET STOCK DIRT

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
36019	G60-15 SH	G60	8.5"	25.5"	81"	8"	8"	10.75"	IMCA
36020	G60-15	G60	8.5"	26"	82"	8"	8"	10.75"	IMCA
36021	G60-15	G60	8.5"	25.5"	81"	8"	8"	10.75"	Non Stamped
36022	G60-15	G60	8.5"	26"	82"	8"	8"	10.75"	Non Stamped
36040	22.5/8-13	CROSSBLOCK	8"	22.5"	69.5"	8"-9"	8"	9.75"	USLCI, 1350, 1600
36042	23/8-13	CROSSBLOCK	8"	23"	72"	8"-9"	8"	9.75"	1350, 1600
36103	8/26.5-15	SUPER CHAIN LINK	8"	26.5"	82"	8"-9"	8"	10.5"	H 500, IMCA 500
36105	8/27-15	SUPER CHAIN LINK	8"	27"	84"	8"-9"	8"	10.5"	H 500, IMCA 500
36107	8/27.5-15	SUPER CHAIN LINK	8"	27.5"	86.5"	8"-9"	8"	10.5"	H 500
36110	8/27.5-15 Short	SUPER CHAIN LINK	8"	26.9"	84.5"	8"-9"	8"	10.5"	H 500
36149	26.5/ 8-15	SUPER CHAIN LINK	8"	26.5"	84"	8"-9"	8"	11.2"	SOFT, MEDIUM 100, MEDIUM
36156	27.5/ 8-15 NRM	SUPER CHAIN LINK	8"	27.5"	86.5"	8"-9"	8"	11.3"	SOFT, MEDIUM 100, MEDIUM, HARD
36175	26.5/ 8-15 Wissota	SUPER CHAIN LINK	8"	26.5"	83"	8"-9"	8"	11.2"	35-W
36180	26.5/ 8-15	SUPER CHAIN LINK	8"	26.5"	83"	8"-9"	8"	11.2"	M30S
36185	27.5/ 8-15 Wissota	SUPER CHAIN LINK	8"	27.25"	85.5"	8"-9"	8"	11.2"	35-W
36190	27.5/ 8-15	SUPER CHAIN LINK	8"	27.25"	85.5"	8"-9"	8"	11.2"	M30S, M60
36240	28/10.5-15	CHAIN LINK	10.5"	28"	86"	10"-12"	10"	13.5"	RC4
36310	29/10.5-15	CHAIN LINK	10.5"	29"	90"	10"-12"	10"	13.5"	RC4
36606	28.5/11-15	ANGLE BLOCK	11"	28.5"	90"	12"-14"	14"	14.5"	USA21, RUSH25, RUSH55
36616	88/11-15	LARGE CROSSBLOCK	11"	28"	87.5"	12"-14"	14"	14.75"	USA21, RUSH25
36621	90/11-15	LARGE CROSSBLOCK	11"	28.5"	89"	12"-14"	14"	15"	W30S
36626	90/11-15	LARGE CROSSBLOCK	11"	28.5"	89"	12"-14"	14"	15"	USA21, USA55, RUSH25, RUSH55
36631	92/11-15	LARGE CROSSBLOCK	11"	29"	92"	12"-14"	14"	15"	W30S
36636	92/11-15	LARGE CROSSBLOCK	11"	29"	92"	12"-14"	14"	15"	USA21, USA55, RUSH25, RUSH55
36700	90/11-15	LARGE CROSSBLOCK	11"	28.5"	89"	12"-14"	14"	15"	NMLT1, NLMT2, NLMT2.25, NLMT2.50, NLMT3
36730	92/11W-15 NRM	VENTED CROSS BLOCK	11"	29"	92"	12"-14"	14"	14.75"	NLMT2, NLMT2.25, NLMT2.50, NLMT3, NLMT4
36800	23/7-13	SUPER CHAIN LINK	7"	23.3"	71.5"	7"-8"	7"	9"	HTWD
36805	205/60-13	DIRT BOZZ STYLE	8"	22.6"	70"	7"-8"	7"	9.1"	STARS Soft, STARS Med
36810	215/60-13	DIRT BOZZ STYLE	8"	23.3"	71.5"	7"-8"	7"	9.3"	STARS Soft, STARS Med
36815	235/60-13	DIRT BOZZ STYLE	8"	23.8"	74"	7"-8"	7"	10.2"	STARS Soft, STARS Med

SOFT		COMPOUND								FIRM
NLMT1	NLMT2	USA21	STARS Med	M30S	USA55	RC4	35-W	IMCA	M60	
SOFT	STARS Soft	1350		NLMT3	RUSH55	NLMT4		H500		
	MEDIUM 100	NLMT2.50		W30S	1600		HARD	IMCA500		
	RUSH25			MEDIUM	USLCI					
	NLMT2.25									




EASTERN MODIFIED / 358 / SPORTSMAN DIRT

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
14131	11/82-15 SH	CHAIN LINK	10.5"	25.6"	80.5"	10"-12"	10"	12"	D300
14133	11/82-15	CHAIN LINK	10.5"	26"	82"	10"-12"	10"	12"	D300
14135	11/87-15	CHAIN LINK	11"	27.2"	85.5"	10"-12"	12"	14.2"	M45
14145	11/90-15	CHAIN LINK	11"	29"	90.5"	10"-13"	12"	14.5"	M45, D60
14151	13/82-15	CHAIN LINK	13"	26.3"	82"	12"-14"	12"	14"	D300, D400
14176	13/87-15 SH	SUPER CHAIN LINK	13"	27.2"	85.5"	12"-14"	14"	16.2"	D300
14177	13/87-15	CHAIN LINK	13"	27.5"	86"	12"-14"	14"	16.2"	D300, D400
14189	13/89-15	CHAIN LINK	13"	28"	88"	12"-14"	14"	16.2"	D300, D400
14224	13/92-15	SUPER CHAIN LINK	13"	29"	91.5"	12"-14"	14"	16.5"	D400
14229	13/92-15 Tall	CHAIN LINK	13"	29.5"	92.5"	12"-14"	14"	16.5"	D300, D400, D500




NON-WING SPRINT / SILVER CROWN SHORT TRACK DIRT

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
38031	85/ 8-15	SUPER CHAIN LINK	8"	27"	84.5"	8"	8"	10.5"	D12
38032	85/ 8-15	SUPER CHAIN LINK	8"	27"	85"	8"	8"	10.5"	D15, D20
38233	105/18-15	LARGE CHECKERBOARD	18"	33.2"	105"	16"-18"	18"	21.5"	RD20, D25
38144	92/14-15	LARGE CHECKERBOARD	15"	29"	92"	14"-15"	14"	18"	SC12
38154	94/14-15	LARGE CHECKERBOARD	15"	30"	94.5"	14"-15"	14"	18"	SC12
38161	96/14-15	LARGE CHECKERBOARD	15"	30"	96"	14"-15"	14"	18"	SC12
38163	98/14-15	LARGE CHECKERBOARD	15"	31.5"	98"	14"-15"	14"	18"	SC12
38164	100/13-15	CHECKERBOARD	15"	31.8"	100"	14"-15"	14"	17.2"	SC12
38223	105/16-15	SPRINT RR CHECKERBOARD	16"	33.2"	105"	16"-18"	17"	20.3"	D15A, MED1



WING SPRINT DIRT

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
38031	85/ 8-15	SUPER CHAIN LINK	8"	27"	84.5"	8"	8"	10.5"	D12
38032	85/ 8-15	SUPER CHAIN LINK	8"	27"	85"	8"	8"	10.5"	D15, D20
38126	88/15-15	LARGE CHECKERBOARD	15"	28"	88"	14"-15"	15"	18.6"	RD12
38139	90/15-15	LARGE CHECKERBOARD	15"	28.5"	90"	14"-15"	15"	18"	RD12
38120	8/27.5-15	SUPER CHAIN LINK	8"	27.4"	86"	8"	8"	10.5"	*RaceSaver
38143	92/14-15	LARGE CHECKERBOARD	15"	29"	92"	14"-15"	14"	18"	*RaceSaver
38149	92/15-15	SPRINT LR CHECKERBOARD	15"	29"	92"	14"-15"	15"	18.5"	D12A
38151	93/15-15	SPRINT LR CHECKERBOARD	15"	29.6"	93"	14"-15"	15"	18.3"	D12A
38153	94/14-15	LARGE CHECKERBOARD	15"	30"	94"	14"-15"	14"	18"	*Racesaver
38155	94/15-15	SPRINT LR CHECKERBOARD	15"	30"	94"	14"-15"	15"	18.3"	D12A
38160	96/14-15	LARGE CHECKERBOARD	15"	30.5"	96"	14"	14"	18.5"	*Racesaver
38168	96/15-15	SPRINT LR CHECKERBOARD	15"	30.5"	96"	14"-15"	15"	18.7"	D12A
38214	104/16-15	RACESAVER	16"	33.1"	104"	16"-18"	17"	19.8"	Racesaver
38223	105/16-15	SPRINT RR CHECKERBOARD	16"	33.2"	105"	16"-18"	17"	20.3"	D15A, MED1
38233	105/18-15	SPRINT RR CHECKERBOARD	18"	33.2"	105"	16"-18"	18"	21.5"	RD20, D25
38230	105/18-15	LARGE CHECKERBOARD	18"	33.2"	105"	16"-18"	18"	21.5"	HTC



SILVER CROWN DIRT / MILE TRACKS

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
38031	85/ 8-15	SUPER CHAIN LINK	8"	27"	84.5"	8"	8"	10.5"	D12
38032	85/ 8-15	SUPER CHAIN LINK	8"	27"	85"	8"	8"	10.5"	D15, D20
38207	103/14-15	LARGE CHECKERBOARD	14.5"	32.1"	103"	14"	14"	18.5"	D50
38233	105/18-15	LARGE CHECKERBOARD	18"	33.2"	105"	16"-18"	21.5"	21.5"	F85A



"THE WINNER AIN'T THE ONE WITH THE FASTEST CAR. IT'S THE ONE WHO REFUSES TO LOSE."

- Dale Earnhardt





MIDGET DIRT / MINI SPRINT / TQ MIDGET

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
35112	68/ 7-13	MIDGET FRONT	7"	21.6"	68"	7"-8"	7"	8.5"	D12
35113	68/ 7-13	MIDGET FRONT	7"	21.8"	68.5"	7"-8"	7"	8.5"	D15
35140	74/10-13	SMALL CROSSBLOCK	10"	23.7"	73"-74"	8"-10"	8"	11.7"	D12
35155	76/10-13	SMALL CROSSBLOCK	10"	24.2"	75"-76"	8"	8"	12"	D12
35161	77/10-13	SMALL CROSSBLOCK	10"	24.5"	77"	8"-10"	8"	12"	D12
35165	78/10-13	SMALL CROSSBLOCK	10"	24.8"	78"	8"	8"	12"	D12
35172	80/10-13	SMALL CROSSBLOCK	10"	25.5"	79"-80"	8"	8"	12"	D12
35234	82/12-13	LARGE CROSSBLOCK	12"	26.1"	82"	10"-12"	10"	14.1"	SP3



MODIFIED MIDGET / MICRO SPRINT DIRT / JR. SPRINT

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
42050	57/6-10	MICRO FRONT	5.8"	18"	57"	5"-6"	5"	6.8"	D12, D15
42100	57/6.5-10	SUPER CHAIN LINK	7"	18"	57"	7"	7"	8.7"	D12
42110	58/7-10	MICRO FRONT	8"	18.25"	58"	6"-7"	6"	8.25"	D12
42124	59/8-10	LARGE CROSSBLOCK	8.5"	18.5"	58.5"	8"	8"	9.5"	RD12
42130	60/7-10	SUPER CHAIN LINK	7.5"	19"	60"	7"	7"	9"	D15
42164	61/8-10	LARGE CROSSBLOCK	8.2"	19"	60.5"	8"	8"	10.1"	RD12, RD15
42168	61/10-10	LARGE CROSSBLOCK	10.2"	19"	60.5"	10"	10"	11.8"	RD12, RD15, RD20
42170	62/8-10	LARGE CROSSBLOCK	8.2"	19.7"	62"	8"	8"	10.1"	RD12, RD15
42172	62/10-10	LARGE CROSSBLOCK	10"	19.7"	62"	10"	10"	11.9"	RD12, RD15
42173	63/8-10	LARGE CROSSBLOCK	8.2"	19"	63"	8"	8"	10.1"	RD12, RD15
42183	63/10-10	LARGE CROSSBLOCK	10"	20"	63"	10"	10"	12"	RD12, RD15, RD20
42185	64/8-10	LARGE CROSSBLOCK	8.2"	20.2"	64"	8"	8"	10.6"	RD12, RD15
42195	64/10-10	LARGE CROSSBLOCK	10"	20.2"	64"	10"	10"	12.5"	RD12, RD15
42225	65/10-10	CROSSBLOCK	10"	20.5"	65"	10"	10"	11.5"	RD12, RD15, RD20
42237	69/10-10	CROSSBLOCK	11"	22"	69"	10"-12"	10"	12.5"	RD20, D25
42239	69/10 W-10	CROSSBLOCK	12.5"	22"	69"-70"	10"-12"	11"	14.7"	RD12, RD15, RD20, RD30, ASCS2
42400	15/6-8	TREADED CAB	6"	15"	49"	6"	6"	7.4"	D12, RD20
42450	15/7-8	SMALL CROSSBLOCK	7"	15"	49"	6"	6"	7.5"	RD20
42500	15/8-8	SMALL CROSSBLOCK	8"	15"	49.5"	7"	7"	8.5"	RD20, RD25
42550	16/8.5-8	SMALL CROSSBLOCK	8.5"	16"	53.5"	9"	9"	10.5"	RD20

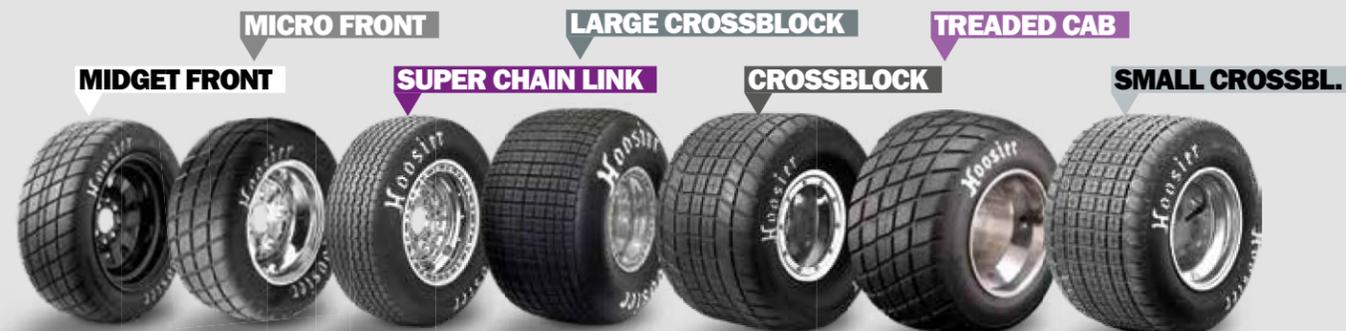

KARTING QUARTER MIDGET



DIRT OVAL KARTING

TREADED KART

ASPHALT OVAL KARTING

MONORIDE

SPOTLIGHT: MONORIDE

ASPHALT QUARTER MIDGET

DIRT QUARTER MIDGET

5" SPRINT / SOLO KART

SUPER KART ENDURO

21
21
22
22
23
24
24
25
25

DIRT OVAL KARTING

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
DIRT OVAL KART TIRES-SOFT, WET, TACKY TRACK									
11325	10.5 x 5-6	SLICK	4.75"	10.5"	32.75"	6.5"	6.5"	6.63"	D20A, D30A
11600	11 x 6-6	SLICK	6"	11"	33"	8.25"-8.5"	8.5"	8.5"	D20A, D30A
11800	11 x 8-6	SLICK RIGHT SIDE	7.5"	11"	34"	10"	10"	10.13"	D20A, D30A
DIRT OVAL KART TIRES-INTERMEDIATE/TRANSITIONING TRACK CONDITIONS									
15500	10.5 x 5-6	SLICK	4.75"	10.5"	32.75"	6.5"	6.5"	6.625"	A40
15600	11 x 6-6	SLICK	6"	11"	33"	8.25"-8.5"	8.5"	8.5"	A40
15800	11 x 8-6	SLICK RIGHT SIDE	7.5"	11"	34"	10"	10"	10.125"	A40
DIRT OVAL KART TIRES-HARD TRACK CONDITIONS									
15456	10.5 x 4.5-6	SLICK	4.75"	10.5"	32.5"	6.5"	6.5"	6.6"	FK
15600	11 x 6-6	SLICK	6"	11"	33"	8.25"-8.5"	8.5"	8.5"	A40, FK



TREADED KART

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
11850	11.5 x 8-6	TREADED CB	8"	11"	36"	9"-10"	10"	9.5"	D10A, D20A, D30A, D50A
11900	11 x 5.5-6	TREADED CAB	5.5"	11"	34.5"	6"-6.5"	6"	6.375"	D10A, D20A, D30A
11901	11 x 5.5-6	TREADED CAB	5.5"	11"	35.75"	5.5"	5.5"	6.375"	Racesaver
11920	11 x 6.5-6	TREADED CAB	6.5"	11"	35.5"	6.5"-8"	6.5"	7.125"	D10A, D20A, D30A
11930	11 x 6-6	TREADED CAB	6.25"	11"	34.2"	6.5"-8"	6.5"	6.75"	D10A, D30A
11939	12 x 8-6	TREADED CB	8"	12"	38.5"	6.5"	6.5"	9.25"	Racesaver
11940	12 x 8-6	TREADED CB	8"	12"	38.5"	6.5"	6.5"	9.25"	D10A, D20A
11941	12 x 8-6	TREADED CB	8"	12"	37.5"	9"-10"	10"	9.75"	D30A
11950	11.5 x 9-6	TREADED CB	9"	12"	37"	9"-10"	10"	10.25"	D10A, D20A, D30A
11960	12 x 9-6	TREADED CB	9"	12"	38.5"	9"-10"	10"	10.25"	D10A, D20A, D30A
11970	12 x 9-6	TREADED CB	9"	12"	38.5"	9"-10"	10"	10.25"	D50A




ASPHALT OVAL KARTING

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
15500	10.5 x 5-6	SLICK	4.5"	10.5"	33.125"	6"-6.5"	6"	6.25"	A40
15656	11 x 6.5-6	SLICK	6.25"	11"	34.75"	8"-9"	8.5"	8.625"	A40
15600	11 x 6-6	SLICK	6"	11"	33"	8.25"-8.5"	8.5"	8.5"	A40, FK
15800	11 x 8-6	SLICK	7.875"	11"	34"	10"	10"	9.75"	A40



MONORIDE

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
12325	10.5 x 5-6	SLICK	4.5"	10.5"	33.125"	6"-6.5"	6"	6.25"	EB1, FF
12505	5X10.5-6	TREADED	4.5"	10.5"	33.75"	4.75"	4.75"	5.75"	EB1
12550	5.5X11-6	SLICK	5.25"	11"	35"	5.25"	4.75"	5.75"	EB1, FF
12605	11 x 6-6	SLICK	6"	11"	33"	8.25"-8.5"	8.5"	8.5"	EB1, FF
12900	11 x 5.5-6	TREADED CAB	5.5"	11"	34.5"	6"-6.5"	6"	6.375"	EB1, FF
12930	11 x 6-6	TREADED CAB	6.25"	11"	34.2"	6.5"-8"	6.5"	6.75"	EB1, FF



SLICK



TREADED CAB



TREADED



MONORIDE

CONQUER. EVERY. RIDE.



MONORIDE



CONQUER. EVERY. RIDE.

- H-DNA Technology
- Dynamic Tread Designs
- Superior Carving
- Increased Traction
- Excellent Responsiveness
- Smooth Ride

Conquer both the daily commute and weekend adventures with the MonoRide, an electric board tire available in both slick and treaded patterns. Featuring two dynamic tread designs, the MonoRide's motorsports derived compounds deliver elite performance, exceptional durability, and effortless handling on any terrain.

ENJOY THE RIDE, OWN THE JOURNEY

Now available on the official Hoosier Amazon Store and at your local Hoosier distributor.

ASPHALT QUARTER MIDGET

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
15031	31/4.5-5	SLICK	4.5"	10.25"	31"	5"-6"	5.5"	5.5"	A35
15032	32/4.5-5	SLICK	4.5"	10.25"	32"	5"-6"	5.5"	5.5"	A35
15033	32/4.5-5 SH	SLICK	4.5"	10.25"	31.5"	5"-6"	5.5"	5.5"	A35
USAC	QTR Midget	Position							
15325	33/5-6 NY1	RIGHT FRONT	4.5"	10.5"	33.125"	6"-6.5"	6"	6.25"	A35
15650	34.5/6.5-6 NY1	RIGHT REAR	6"	11"	34.5"	8"-8.5"	8.5"	8.25"	A35



DIRT QUARTER MIDGET

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
11031	31/4.5-5	SLICK	4.5"	10"	31"	5"-6"	5.5"	5.5"	D10
11032	32/4.5-5	SLICK	4.5"	10.25"	32"	5"-6"	5.5"	5.5"	D10
USAC	QTR Midget	Position							
11175	33/5-6	RIGHT FRONT	4.5"	10.5"	33.125"	6"-6.5"	6"	6.25"	D10
11225	34.5/6.5-6	RIGHT REAR	6.25"	11"	34.5"	8"-8.5"	8.5"	8.25"	D10



5" SPRINT / SOLO KART

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
22149	4.5/10-5	SLICK	4.25"	10"	32"	5"-5.5"	5"	5.5"	R55
22150	4.5/10-5	SLICK	4.25"	10"	32"	5"-5.5"	5"	5.5"	R60A, R60B
22155	4.5/10-5	SLICK	4.25"	10"	32"	5"-5.5"	5"	5.5"	R70
22180	4.5/10-5	SLICK	4.25"	10"	32"	5"-5.5"	5"	5.5"	R80
22250	6/11-5	SLICK	5.5"	11"	34"	7"-7.25"	7"	7.25"	R60A, R60B
22260	6/11-5	SLICK	5.5"	11"	34"	7"-7.25"	7"	7.25"	R70, R80
22368	7.1/11-5	SLICK	6.375"	11"	34"	8"-8.25"	8.25"	8.5"	R55
22375	7.1/11-5	SLICK	6.375"	11"	34"	8"-8.25"	8.25"	8.5"	R60A, R60B
22380	7.1/11-5	SLICK	6.375"	11"	34"	8"-8.25"	8.25"	8.5"	R70, R80
22405	4.5/10-5	RAIN FRONT	4.25"	10"	32.25"	4.75"	4.75"	5.25"	WET
22435	6/11-5	RAIN REAR	5.5"	11"	34.5"	6.75"	6.75"	7.25"	WET



SUPER KART ENDURO

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
22450	4.5/10.5-6	SLICK	4.375"	10.5"	33.75"	5"-6"	5"	5.5"	R60A, R60B
22505	5/10.5-6 W3 CIK	RAIN FRONT	4.5"	10.5"	33.75"	4.75"	4.75"	5.75"	WET
22550	5.5/11-6 SK CIK	SLICK	5.125"	11"	35"	4.75"-6"	4.75"	5.75"	R60B SK
22710	7.1/11.5-6 W3 CIK	RAIN REAR	6.75"	11.5"	35.875"	8"	8"	8.25"	WET
22800	8/11.5-6 SK CIK	SLICK	7"	11.5"	35.875"	8"-9"	8"	8.25"	R60B SK



“NOBODY IS BORN WITH A STEERING WHEEL OR A GEAR SHIFT IN HIS HAND. IT’S SOMETHING YOU CHOOSE TO DO OR YOU DON’T.”

– Mario Andretti



DRAG RACING



DRAG RACING – BIAS

DRAG RACING – RADIAL

DRAG BRACKET – RADIAL

SPOTLIGHT: DR3

JR DRAGSTER

D.O.T. DRAG – RADIAL

QUICK TIME PRO D.O.T.

QUICK TIME D.O.T.

RACING TUBES & LINER

27-28
28
28
29
30
30
31
31
31

DRAG RACING – BIAS

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND	TUBE ID
DRAG FRONT										
18085	23X 5-15	DRAG FRONT	4.8"	23"	72"	3.5"-4"	3.5"	5.5"	Drag Front	
18095	24X 5-15	DRAG FRONT	4.8"	23.8"	75"	3.5"-4"	3.5"	5.8"	Drag Front	
18100	25X 4.5-15 PRO	DRAG FRONT	4.5"	25"	78"	3.5"-4"	3.5"	5.75"	Drag Front	
18102	25X 5-15	DRAG FRONT	4.8"	24.8"	77.9"	3.5"-4"	3.5"	6.3"	Drag Front	
18103	26X 4.5-17	DRAG FRONT	4.5"	26.3"	82"	3.5"-4.5"	4.5"	5.8"	Drag Front	
18105	26X 4.5-15	DRAG FRONT	4.3"	25.8"	81"	3.5"-4"	3.5"	6"	Drag Front	
18106	27X 4.5-15	DRAG FRONT	4.5"	27"	85"	3.5"-4"	4"	6.8"	Drag Front	
18107	28X 4.5-15	DRAG FRONT	4.5"	27.7"	87"	3.5"-4"	4"	7.5"	Drag Front	
18108	22X 2.5-17	DRAGSTER FRONT	1.5"	22"	69"	2.5"	2.5"	2.7"	Dragster Front	
18109	27.5X 4.5-17	DRAG FRONT	4.8"	27.6"	86.5"	3.5"-4.5"	4.5"	7.5"	Drag Front	
18112	28X 4.5-18	DRAG FRONT	4.5"	28"	88.5"	3.5"-5"	5"	7.25"	Drag Front	
DRIVE TIRES – SLICKS										
18060	24.5/8-13	DRAG SLICK	7.8"	24.3"	76"	6"-8"	7"	9"	D06	A
18062	24.5/8-15	DRAG SLICK	7.8"	24.5"	76.75"	7"-9"	8"	8.7"	C02	A
18063	24.5/9-15	DRAG SLICK	8.7"	24.7"	77.25"	8"-9.5"	9"	9.9"	C02	A
18110	26/8-15	DRAG SLICK	8"	26.1"	82"	7"-8"	8"	9.7"	D06	A
18115	26/8.5-15*	DRAG SLICK	9"	26.1"	82"	7"-8"	8"	10.3"	C11	A
18120	26/9-15	DRAG SLICK	9"	26.1"	82"	7"-8"	8"	10.5"	D06	A
18131	26/10-15	DRAG SLICK	10"	26.2"	82"	8"-10"	9"	11"	D06	A
18140	28/9-15	DRAG SLICK	9"	28"	88"	8"-10"	8"	11.1"	D06	A
18150	28/10-15	DRAG SLICK	10"	28"	88"	8"-10"	8"	11.3"	D06	A
18153	28/10-16	DRAG SLICK	10"	28"	88"	8"-10"	10"	12"	C07	A
18154	28/10.5-15*	DRAG SLICK	10.2"	28"	88"	8"-10"	10"	12.5"	D05	A
18155	28/10.5-15*	DRAG SLICK	10.2"	28"	88"	8"-10"	10"	12.3"	C07	A
18156	28/10.5-15W	DRAG SLICK	10.9"	28"	88"	10"-12"	10"	13.1"	C07	A
18157	28/10-17	DRAG SLICK	9.5"	28"	88"	8"-10"	8"	10.3"	D06	D
18158	28/10-18	DRAG SLICK	9.5"	28"	88"	8"-10"	10"	11"	D06	D
18160	29/ 9-15	DRAG SLICK	9"	29.1"	91.5"	8"-10"	8"	11.3"	D06, D07	B
18170	29/10-15	DRAG SLICK	10"	29.1"	91.5"	8"-10"	8"	11.9"	D06	B
18175	29/10.5-15 W*	DRAG SLICK	11"	29.3"	92"	8"-10"	10"	13"	D06	B
18180	29/11-15	DRAG SLICK	11"	29.3"	92"	8"-10"	10"	13.2"	D06	B
18190	29/12-15	DRAG SLICK	12"	29.3"	92"	10"-12"	10"	13.7"	D06	B
18192	29.5/10.5-15	DRAG SLICK	11.1"	30.6"	96"	10"-12"	10"	13.2"	D06	B
18194	29.5/10.5S-15*	DRAG SLICK	10.5"	29.5"	94"	8"-10"	10"	13.3"	C06	B
18195	29.5/11.5-15 W*	DRAG SLICK	13.5"	30.6"	96"	12"-14"	12"	15"	D06	B
18200	30/ 9-15	DRAG SLICK	9"	30"	94"	8"-10"	8"	11.5"	D05, D07	B
18205	30/10.5-15	DRAG SLICK	10.5"	30"	94"	8"-10"	10"	13.3"	D05	B
18220	30.5/10.5-15	DRAG SLICK	10.5"	30.5"	97"	10"-12"	12"	14.5"	C07	B
18235	31.5/12.5-15 W*	DRAG SLICK	13.5"	31.7"	99.5"	12"-14"	14"	17"	D05	B
18237	13.5/31.5-15L***	DRAG SLICK	13.5"	31.7"	99.5"	12"-14"	14"	17.2"	C07	B
18240	31/14-15	DRAG SLICK	14"	31.2"	98"	12"-14"	12"	16.5"	D05	C
18242	32/12-15	DRAG SLICK	12.2"	32"	101"	10"-12"	12"	16"	D05	C
18243	32/13-15	DRAG SLICK	13.2"	32"	101"	12"-13"	12"	16.5"	D05	C
18245	32/13.5-15 W*	DRAG SLICK	14"	32.3"	102"	12"-14"	14"	17.5"	D05	C
18250	32/14-15	DRAG SLICK	14"	32.3"	102"	12"-14"	14"	17.5"	D05	C
18255	14/32-15 L***	DRAG SLICK	14"	32.3"	102"	12"-14"	14"	17.5"	C07	C
18260	32/14.5-15 W*	DRAG SLICK	15"	32.6"	102.5"	14"-15"	14"	18"	D05	C
18265	14.5/32-15 L***	DRAG SLICK	15"	32.3"	102"	14"-15"	14"	18"	C07	C
18300	32.5/16.5-15*	DRAG SLICK	16.7"	32.3"	101.5"	15"-16"	15"	19.5"	C07	C
18332	33/10.5-15 Outlaw	DRAG SLICK	10.8"	33"	104"	10"-12"	12"	15.5"	C11	C
18336	33/10.5W-16	DRAG SLICK	11.3"	33"	104"	16"	16"	17.3"	C11	C
18350	33/12-15	DRAG SLICK	12.2"	33"	102"	10"-12"	10"	15.3"	C09	C
18355	33/13-15	DRAG SLICK	13.2"	33"	102"	12"-13"	12"	16.7"	C06	C
18367	14.5/33-15 L***	DRAG SLICK	14.5"	33"	104"	14"-16"	14"	17.8"	C07	C
18370	33/15-15	DRAG SLICK	15"	33"	104"	14"-15"	14"	18.3"	D05	C
18372	33/15S-15*	DRAG SLICK	15"	33"	104"	14"-15"	15"	18.5"	D06	C

DRAG RACING – BIAS (CONTINUED)

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND	TUBE ID
18400	33/16-15*	DRAG SLICK	17"	33"	104"	15"-16"	15"	19.8"	D05, D06, C07	C
18450	33/16.5-15 S**	DRAG SLICK	17"	33"	104"	15"-16"	15"	19.8"	D06	C
18500	33/17-16*	DRAG SLICK	17"	33"	104"	15"-16"	15"	19.8"	C07	C
18600	33.5/16-15*	DRAG SLICK	17"	33.6"	106"	15"-16"	15"	19.5"	C07	C
18650	33.5/17-16*	DRAG SLICK	17"	33.6"	106"	15"-16"	16"	19.5"	C07	C
18700	33.5/17-16	DRAG SLICK	17"	33.6"	106"	15"-16"	16"	20.3"	C06	A*
18705	33.5/17-16	DRAG SLICK	17"	33.6"	106"	15"-16"	16"	20.3"	C35	A*
18740	34/14-16	DRAG SLICK	14"	34"	108"	13"-16"	*16"(*Beadlock Only)	18.3"	C1350	
18750	35/15-16	DRAG SLICK	15"	35"	110"	14"-16"	16"	18.6"	C1450	
18770	15/34.5-16	DRAG SLICK	15"	35"	110"	15"-16"	16"	19.5"	C1550	
18780	17/34.5-16	DRAG SLICK	17"	35"	110"	15"-16"	16"	20"	C2055, N2021	A*
18790	34.5/17-16	DRAG SLICK	17"	35"	110"	15"-16"	16"	21"	W2021	A*
18910	17/36-16	DRAG SLICK	17"	36.2"	112.5"	15"-16"	16"	20.5"	C2021, C2055	A*
18950	7/29-15	DRAG MASTER	7"	29"	91"	6"-8"	7"	10.4"	DRAG	A

DRAG RACING – RADIAL

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
18198	29.5/10.5R-15 Radial***	DRAG SLICK	10.5"	29.9"	94"	8"-10"	10"	12.5"	C06
18209	30/ 9R-15 Radial***	DRAG SLICK	9"	29.5"	92.5"	8"-10"	8"	11"	C06
18210	30/ 9R-15 Radial	DRAG SLICK	9"	29.5"	92.5"	8"-10"	8"	11"	C07
18212	9/30R-15 Radial***	DRAG SLICK	9"	29.9"	94"	8"-10"	8"	11"	C06
18213	9/30R-15 Radial***	DRAG SLICK	9.9"	30"	94"	9"-10"	10"	12.2"	C30
18214	30/10.5R-15 Radial***	DRAG SLICK	10.5"	29.5"	92.5"	9"-10"	10"	12.5"	C06
18215	30/10.5R-15 Radial	DRAG SLICK	10.5"	29.5"	92.5"	9"-10"	10"	12.5"	C07
18239	31.5/13.5R-15 Radial	DRAG SLICK	13.5"	31.8"	99.7"	14"-15"	14"	16.3"	C06
18247	32/13.5R-15 Radial	DRAG SLICK	13.5"	32.2"	101.5"	14"-15"	14"	16.8"	C06

*STIFF SIDEWALL-**SOFT SIDEWALL-***LIGHTWEIGHT

DRAG BRACKET – RADIAL

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
18805DBR	26/8.5 R15	DRAG SLICK	8.5"	26.2"	82.5"	8"-9"	8"	10.2"	DBR
18810DBR	26/10 R15	DRAG SLICK	10.5"	26.2"	82.5"	9"-11"	9"	11.7"	DBR
18815DBR	28/9 R15	DRAG SLICK	9.5"	28"	88.25"	8"-10"	8"	11.1"	DBR
18820DBR	28/10.5 R15	DRAG SLICK	10.5"	28"	88.5"	10"-12"	10"	12.7"	DBR
18825DBR	28/10.5 R17	DRAG SLICK	10.5"	28"	88.5"	10"-11"	10"	11.5"	DBR
18830DBR	28/10.5 R18	DRAG SLICK	10.5"	28"	88.5"	10"-11"	10"	11.5"	DBR
18835DBR	29.5/10.5 R15	DRAG SLICK	10.5"	29.5"	93.5"	9.5"-12"	10"	13.2"	DBR
18837DBR	29.5/10.5 R17	DRAG SLICK	10.9"	29.8"	93.9"	9.5"-12"	9.5"	12.1"	DBR
18845DBR	29.5/11.5 R18	DRAG SLICK	11.6"	29.8"	93.8"	10"-12"	11"	13.3"	DBR
18850DBR	29.5/11.5 R20	DRAG SLICK	11.6"	29.9"	93.9"	10"-12"	11"	12.9"	DBR
18860DBR	31/10.5 WR15	DRAG SLICK	11.5"	31.4"	98.75"	12"-14"	14"	16"	DBR

DRAG FRONT



DRAGSTER FRONT



DRAG SLICK



DRAG MASTER



CONQUER. EVERY. STRIP.

NEW DR3

- ENGINEERED TO TAKE ON MORE POWER FOR QUICKER ELAPSED TIMES.

- NEW DR3 COMPOUND ENHANCED WITH THE LATEST H-DNA TECHNOLOGY FOR OPTIMUM TRACTION.

- DESIGNED FOR CLASSES AND EVENTS THAT REQUIRE A P275/60R15 D.O.T. APPROVED RADIAL.



H-DNA

Pushing boundaries and defying limits. H-DNA was forged from a legacy of unrivaled racing excellence and relentless performance. Ignite your passion, empower your pride and drive your success as you conquer life on and off the track.

HOOSIER

See The Full Line of Hoosier Products at HoosierTire.com



DR3 Tire intended for race only, not for street use.

JR DRAGSTER

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
18010	16/ 1.5-12	JR. FRONT	1"	16"	50"	1"-1.5"	1.5"	1.7"	TUBE REQUIRED
18031	18/ 8-8	DRAG SLICK	7.7"	17.7"	55"	7"-8"	8"	9.9"	PRO 8
18036	18/ 9-8	DRAG SLICK	8.5"	17.7"	55.5"	8"-9"	8"	10.25"	PRO 9
18041	18/10-8	DRAG SLICK	9.5"	17.7"	55"	8"-10"	8"	10.6"	PRO10

D.O.T. DRAG – RADIAL

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
17310DR2	P225/50R15	DR2	8.5"	23.9"	75.2"	7"-9"	7"	9.5"	DR2
17313DR2	P295/55R15	DR2	11"	27.6"	86.7"	8"-10"	9.5"	12.5"	DR2
17314DR2	P235/60R15	DR2	8.4"	26.2"	82.3"	7"-9"	7"	10"	DR2
17315DR2	P275/50R15	DR2	9.5"	25.6"	80.5"	8"-10"	8.5"	10.8"	DR2
17316DR2	P295/65R15	DR2	10"	30"	94.5"	8"-10"	8.5"	12"	DR2
17317	P275/60R15	DOT	9.8"	27.7"	87"	8"-10"	8"	11.5"	DOT
17318DR2	P325/50R15	DR2	11.75"	27.7"	87"	9"-11"	10"	13.5"	DR2
17320DR2	P225/50R16	DR2	8.4"	24.9"	78.2"	7"-9"	7"	9.3"	DR2
17325DR2	P255/50R16	DR2	9.3"	26.1"	82"	8"-10"	8"	10.7"	DR2
17326DR2	P295/50R16	DR2	10.5"	27.7"	87"	8"-10"	9"	12.7"	DR2
17327DR2	P225/45R17	DR2	8.3"	24.9"	78.3"	7"-8.5"	8"	9.7"	DR2
17328DR2	P245/45R17	DR2	9.2"	26"	81.7"	7.5"-9"	8"	10"	DR2
17330DR2	P275/40R17	DR2	10"	25.8"	81"	9"-11"	10"	11"	DR2
17332DR2	P315/35R17	DR2	11.5"	25.9"	81.3"	9"-11"	11"	12.6"	DR2
17335DR2	P335/35R17	DR2	12"	25.9"	81.3"	11"-13"	12"	13.5"	DR2
17340DR2	P245/40R18	DR2	8.8"	26"	81.5"	7"-9"	9"	10.3"	DR2
17342DR2	P315/30R18	DR2	11"	26"	81.5"	11"-12"	11"	12.5"	DR2
17343DR2	P325/45R18	DR2	10.6"	30.2"	94.3"	10"-12"	11"	13.1"	DR2
17345DR2	P335/30R18	DR2	12.2"	25.9"	81.3"	12"-13"	12"	13.4"	DR2
17375DR3	P275/60R15	DR3	10"	28.4"	89.5"	8"-10"	10"	12.3"	DR3

SOFT	COMPOUND										FIRM
	PRO 8,9,10	DBR	D06	C06	BR3	C07	C11	DRAG	D07	C1550	DRAG FRONT
	D05		DR2	C35		C09				C2055	
			QTP							C2021	
										N2021	
										W2021	



WARNING: DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

QUICK TIME PRO D.O.T.

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	TUBE ID
17411	26 x 9.5-14 LT	QUICK TIME PRO	8"	26.1"	82"	6"-8"	8"	10"	
17415	26 x 9.50-15 LT	QUICK TIME PRO	8"	26.1"	82"	6"-8"	8"	10"	A
17421	26 x 11.50-15 LT	QUICK TIME PRO	10"	26.1"	82"	8"-10"	8"	10.8"	A
17431	26 x 9.50-16 LT	QUICK TIME PRO	8"	26.1"	82"	6"-8"	8"	9.3"	A
17500	27 x 10.50-15 LT	QUICK TIME PRO	9"	27.1"	85"	8"-10"	8"	10.5"	A
17510	27 x 11.50-15 LT	QUICK TIME PRO	10"	27.1"	85"	8"-10"	8"	11.3"	A
17601	28 x 11.50-15 LT	QUICK TIME PRO	10"	27.9"	87.5"	8"-10"	8"	11.2"	A
17604	28 x 11.50-17 LT	QUICK TIME PRO	9.75"	28.5"	89"	8"-10"	10"	13.1"	D
17606	28 x 13.50-15 LT	QUICK TIME PRO	11"	27.8"	87.3"	10"-12"	10"	12.8"	A
17611	28 x 14.50-15 LT	QUICK TIME PRO	12"	27.7"	87"	10"-12"	10"	13.3"	A
17652	28 x 14.50-17 LT	QUICK TIME PRO	11.75"	28.5"	89"	10"-12"	11"	13.5"	
17702	29 x 12.50-15 LT	QUICK TIME PRO	10"	29"	91"	8"-10"	10"	12.8"	B
17705	29 x 13.50-15 LT	QUICK TIME PRO	11"	29"	91"	10"-12"	10"	13.3"	B
17710	29 x 14.50-15 LT	QUICK TIME PRO	12"	29.2"	91.8"	10"-12"	10"	13.8"	B
17795	31 x 14.50-15 LT	QUICK TIME PRO	11"	30.6"	96"	10"-12"	10"	14.3"	C
17800	31 x 16.50-15 LT	QUICK TIME PRO	13.1"	30.9"	97"	12"-14"	12"	15.8"	C
17810	31 x 18.50-15 LT	QUICK TIME PRO	15"	30.9"	97"	14"-15"	14"	17.8"	C
17900	33 x 18.50-15 LT	QUICK TIME PRO	15"	33"	103.5"	14"-15"	14"	18.5"	C
17910	33 x 22.50-15 LT	QUICK TIME PRO	17"	33.4"	105"	15"-16"	15"	19.3"	C

QUICK TIME D.O.T.

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	TUBE ID
17050	P245/60D-15	SUPER CHAIN LINK	8"	26.2"	82.3"	6"-8"	8"	10.2"	A
17110	P275-60D-15	SUPER CHAIN LINK	9"	27.3"	85.8"	8"-10"	8"	11.3"	A
17125	P295/60D-15	SUPER CHAIN LINK	10"	29.6"	93"	8"-10"	8"	12"	B
17130	P325/50D-15	SUPER CHAIN LINK	10.5"	28.1"	88.3"	8"-10"	8"	12.5"	A
17140	31 x 16.50-15 LT	SUPER CHAIN LINK	14"	30.7"	96.5"	12"-14"	14"	17.8"	B
17150	31 x 18.50-15 LT	SUPER CHAIN LINK	15"	31.1"	97.5"	14"-15"	14"	18"	C

SOFT	COMPOUND										FIRM
	QUICK TIME PRO									QUICK TIME	QUICK TIME FRONT

RACING TUBES & LINER

ITEM NUMBER	TUBE SIZE	DESCRIPTION	TUBE ID
288088-15	80/88-15 TUBE	WILL FIT 80" TO 88" CIRC.	6" TO 11" TREAD WIDTH A
288088-17	80/88-17 TUBE	WILL FIT 80" TO 88" CIRC.	6" TO 11" TREAD WIDTH D
2886100-15	86/100-15 TUBE	WILL FIT 86" TO 100" CIRC.	11" TO 13" TREAD WIDTH B
2894106-15	94/106-15 TUBE	WILL FIT 94" TO 106" CIRC.	15" TO 19" TREAD WIDTH C
18991	75/16-16 LINER	FOR USE WITH ITEM NUMBERS 18780, 18790 & 18910	A*
18992	75/16-16 BEADLINER	FOR USE WITH ITEM NUMBERS 18780, 18790 & 18910	N/A



WARNING: DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

CIRCUIT RACING



FORMULA STUDENT (FSAE)

HILL CLIMB

CIRCUIT RACING SLICKS – BIAS

CIRCUIT RACING SLICKS – RADIAL

SPOTLIGHT: GR Cup

CIRCUIT RACING WETS – BIAS

CIRCUIT RACING WETS – RADIAL

SPOTLIGHT: USF

HISTORIC SPORTSCAR

HISTORIC FORMULA

HISTORIC RADIAL

HISTORIC CONTINENTAL

SPOTLIGHT: HISTORIC

TrackAttack RACE

CIRCUIT RACING D.O.T. – RADIAL WET

33
33
34
34/36
35
36
36
37
38
38
39
39
40
41
42

FORMULA STUDENT (FSAE)

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	WEIGHT	TREAD WIDTH	APPROX. DIA.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
41100	6/18-10	FSAE-SLICK	8LBS	6"	18.1"	6"-7"	7"	8.5"	LC0
43070	16 x 6-10	FSAE-SLICK	7LBS	6"	16.3"	6"-7"	6"	6.9"	R20
43075	16 x 7.5-10	FSAE-SLICK	8LBS	7.3"	16.2"	6"-8"	8"	8.4"	LC0, R20
43100	18 x 6-10	FSAE-SLICK	9LBS	6.2"	18.1"	6.5"-7"	6"	8.1"	R20
43104	18 x 7.5-10	FSAE-SLICK	10LBS	7.5"	18.3"	7"-8"	8"	9.5"	R20
43164	20.5 x 7-13	FSAE-SLICK	11LBS	7"	21"	5.5"-8"	6"	8"	R20
43167	20 x 7.5-13	FSAE-SLICK	12LBS	8"	20.6"	7"-9"	8"	9.4"	R20
44070	16 x 7-10	CIRCUIT WET	7.5LBS	7"	16.2"	6"-7"	6"	7.6"	W3
44115	18 x 6-10	FSAE-WET	9LBS	6.2"	17.8"	6"-8"	6"	7.8"	W3
44125	19.5 x 6.5-10	CIRCUIT WET	10LBS	6.2"	19.5"	6"-8"	6"	8.2"	Wet
44150	20 x 7.5-13	CIRCUIT WET	12LBS	7.4"	20.6"	6"-8"	7"	8.3"	W3
44185	21 x 6.5-13	CIRCUIT WET	11LBS	6.7"	20.9"	6"-8"	6"	7.2"	W3

HILL CLIMB

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
43141	20x7-13	BIAS-SLICK	6.7"	20.3"	63.8"	6"-8"	6"	7.3"	R11, R20
43164	20.5x7-13	BIAS-SLICK	6.8"	21"	66.2"	6"-8"	6"	8"	R11, R20
43167	20x7.5-13	BIAS-SLICK	8"	20.6"	65"	6"-9"	8"	9.4"	R11, R20
43187	20x9-13	BIAS-SLICK	9.75"	20.6"	65"	8"-10"	10"	11"	R11, R20
43285	22x8-13	BIAS-SLICK	8"	22"	69"	7"-9"	8"	9.6"	R11, R20
43290	22x9-13	BIAS-SLICK	8.8"	22.1"	69.5"	8"-10"	8"	10"	R11, R20
43316	23x12-13	BIAS-SLICK	12"	23.6"	74.1"	12"-15"	15"	15.9"	R11, R20
43358	190/540R13	RADIAL SLICK	7.75"	21.3"	66.9"	7"-8.5"	7"	8.5"	US
43359	200/540R13	RADIAL SLICK	7.9"	21.3"	67"	8"-9"	9"	9.4"	SS1
43362	210/550R13	RADIAL SLICK	8.7"	21.8"	68.5"	8"-10"	10"	10.5"	US
43363	240/580R13	RADIAL SLICK	9.4"	22.9"	72"	9"-10"	10"	10.7"	US, SS1
43364	250/575R13	RADIAL SLICK	10"	22.7"	71.3"	9"-10"	10"	10.9"	US, SS1
43367	275/570R13	RADIAL SLICK	10.8"	22.5"	70.7"	11"-12"	12"	12.6"	US, SS1
43368	300/590R13	RADIAL SLICK	12"	23.1"	72.8"	12"-13"	12.5"	13.8"	US, SS1
43369	315/660R13	RADIAL SLICK	11.8"	25.6"	80.3"	13"-14"	13"	14.7"	US, SS1
43373	330/620R13	RADIAL SLICK	13.6"	24.2"	76"	14"-15"	15"	16.2"	US
43502	21.5x7.5-15	BIAS-SLICK	6.2"	22"	69"	6"-7.5"	6"	7.25"	R11, R20
43504	21.5x8.7-15	BIAS-SLICK	8.5"	21.8"	68.5"	8"-9"	8"	9"	R11, R20
43506	21.5x10-15	BIAS-SLICK	9.7"	22"	69"	9"-10"	10"	10.5"	R11, R20
43554	200/580R15	RADIAL SLICK	8"	22.9"	71.9"	6.5"-8"	8"	8.8"	US, SS1
43561	215/580R15	RADIAL SLICK	8.6"	22.9"	71.8"	7"-9"	7"	9.7"	S
43570	240/580R15	RADIAL SLICK	9.4"	22.9"	72"	8"-10"	10"	10.7"	S
43605	265/605R16	RADIAL SLICK	9.7"	23.9"	75.1"	9"-10"	10"	10.9"	US, SS1
43711	200/610R17	RADIAL SLICK	TBD	TBD	TBD	TBD	TBD	TBD	S
00000	235/610R17	RADIAL SLICK	TBD	TBD	TBD	TBD	TBD	TBD	S1
43822	240/640R18	RADIAL SLICK	8.6"	22.9"	71.8"	7"-9"	7"	9.7"	SS1
43838	265/650R18	RADIAL SLICK	10.1"	25.5"	80"	9"-10"	10"	10.9"	SS1
43870	310/650R18	RADIAL SLICK	11.6"	25.8"	81.1"	11"-13"	12"	12.8"	SS1
43893	325/710R18	RADIAL SLICK	12"	27.7"	87"	11"-13"	13"	13.7"	SS1

FSAE SLICK

FSAE WET

CIRCUIT WET

SLICK



CIRCUIT RACING SLICKS – BIAS

ITEM NUMBER	TIRE SIZE	APPLICATION	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
43080	16X7.5-10		7.3"	16.2"	52.8"	6"-8"	8"	8.4"	R25B, R60
43100	18 x 6-10	F500	6.2"	18.1"	57"	6"	6"	8.1"	R20, R35B
43104	18 x 7.5-10	F500	7.5"	18.3"	57.5"	7"-8"	8"	9.5"	R20, R35B
43130	20 x 6-13	CF	6"	20.7"	65"	5.5"-6.5"	5.5"	7"	R60A
43140	20 x 7-13	SIDECAR	6.7"	20.2"	63.5"	6"-8"	6"	7.4"	R20
43141	20X7-13		6.7"	20.3"	63.8"	6"-8"	6"	7.3"	R20, R35B
43164	20.5 x 7-13	FB, FC, FM, SR	6.75"	21"	66.2"	6"-8"	6"	8"	R20, R35B, R60A
43167	20 x 7.5-13	SR, SIDECAR	8"	20.6"	65"	6"-9"	8"	9.4"	R20, R35B
43173	20 x 8-13 CL	FP, HP, GT3, GTL	8.2"	19.8"	63.5"	5"-6"	6"	9.2"	MS
43187	20 x 9-13	FA, SR	9.75"	20.6"	64.7"	8"-10"	10"	11"	R20, R35B
43195	20 x 10-13	SIDECAR	10"	19.8"	62.4"	9"-11"	10"	11.6"	R20
43272	22 x 8-13	SCCA-FE	8"	22"	69"	7"-9"	8"	9.6"	FE
43285	22 x 8-13	FB, FC, FM, S2	8"	22"	69"	7"-9"	8"	9.6"	R20, R35B, R60A
43290	22 x 9-13	FA, FB, FC, FM, S2	8.8"	22.1"	69.5"	8"-10"	8"	10"	R20, R35B, R60A
43305	22.5 x 7.2-13	CF	7.25"	22.6"	71"	5.5"	5.5"	9.8"	R20
43307	22.5 x 7.2-13	CF	7.25"	22.6"	71"	5.5"	5.5"	9.8"	R60A
43312	22 x 10-13	SCCA-FE	9.8"	22.6"	71"	8"-10"	10"	11.6"	FE
43313	22.5 x 10-13	SR	9.8"	22.6"	71"	8"-10"	10"	11.6"	R20, R35B
43316	23 x 12-13	FA, SR	12"	23.6"	74.1"	12"-15"	15"	15.9"	R20
43337	21 x 5-15 C4000	FV	5"	21.2"	66.5"	4"	4"	5.5"	FVS
43353	22.5 x 5.5-15 C4000	FV	5.5"	21.9"	69"	4"	4"	6.5"	FVS
43320	26X15-13		15.7"	25.5"	80.1"	15"	15"	18.1"	R20

ALL TREAD PATTERNS SLICK

SOFT	COMPOUND								FIRM
	R15	R20	R35B			MS,FE		FVS	
						R60A			

CIRCUIT RACING SLICKS – RADIAL


ITEM NUMBER	TIRE SIZE	APPLICATION	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
43322	185/60R13	FF	6.4"	21.8"	68.7"	5.5"	5.5"	7.7"	R60A
43327	205/60R13	FF	8"	22.7"	71.4"	5.5"	5.5"	8.7"	R60A
43360	200/540R13	P1, P2 FRONT	7.9"	21.3"	67"	9"	8"-9"	9.7"	S1, S2
43362	210/550R13	PRO MAZDA/NORMA FRONT	8.7"	21.8"	68.5"	8"-10"	10"	10.5"	S2
43363	240/580R13	Proto/F3 Front/F4 Rear	9.4"	22.9"	72.0"	10"	9-10"	10.7"	SS1, S2, MS
43365	250/575R13		10"	22.7"	71.3"	9"-10"	10"	10.9"	MS
43367	275/570R13	P1, P2 REAR, PRO MAZDA	10.75"	22.5"	70.7"	12"	11"-12"	12.56"	SS1, S1, S2
43368	300/590R13	F3	12"	23.1"	72.8"	12.5"	12"-13"	13.8"	SS1, S2, MS
43369	315/660R13		11.8"	25.6"	80.4"		13"	14.7"	SS1, S2
43379	20.5x7R13	SPORTS 2000 FRONT	7.3"	20.8"	65.3"	6"-7"	6"	7.7"	MS
43380	22.5x8R13	SPORTS 2000 REAR	8.4"	22.4"	70.3"	7"-8"	8"	9.6"	MS
43550	215/530R13	PROD., GT, GTL	8.3"	20.8"	65.4"	6"-7"	7"	8.8"	MS, M
43554	200/580R15	RADICAL FRONT	8"	22.9"	71.9"	6.5"-8"	8"	8.8"	SS1, MS
43560	215/580R15	EP, FP, HP	8.6"	22.9"	71.8"	7"-9"	7"	9.7"	MS
43561	215/580R15	EP, FP, HP	8.6"	22.9"	71.8"	7"-9"	7"	9.7"	S
43566	240/580R15	EP, FP, GT3	9"	22.9"	72"	7"	7"-10"	9.6"	MS, M
43570	240/580R15	FA/INDY LIGHTS	9.4"	22.9"	72"	10"	10"	10.7"	S
43575	275/650R15	INDY CAR	10.1"	25.3"	79.6"	10"	10"	11.4"	MS
43578	330/620R15	FA/INDY LIGHTS	13.5"	24.5"	76.5"	14"	14"	14.8"	S
43589	330/700R15	SCCA GT2	11.9"	27.7"	87.1"	10"-10.5"	10"	13"	M
43596	350/700r15	INDY CAR	13.4"	27.4"	85.9"			16.2"	MS
43605	265/605R16	RADICAL REAR	9.7"	23.9"	75.1"	9"-10"	10"	10.9"	MS
43654	23.5 x 11R16	GT2, GT, Touring	10.6"	23.6"	74.0"	10"	10"	11"	S, MS
43659	23.5 x 12R16	GT2, GT, Touring	12"	23.5"	73.8"	10"-12"	12"	13"	S
43673	25.5 x 12.5R16	GT2, GT, Touring	12.4"	25.8"	81"	10"-12"	12"	13.5"	S, MS
43674	25.5 x 14R16	GT1, GT, TOURING	13.6"	25.7"	80.9"	12"	12"	14.1"	S, MS
43675	355/650R16	GT1	13.6"	25.7"	80.9"	12"	12"	14.1"	S2
43697	28.0X14.5R16	GT1, GT, TOURING	13.9"	28.2"	88.5"	13"	13"	15.1"	S, MS



Toyota Gazoo Racing North America (TGRNA) will return for its fourth season of the GR Cup Series in 2026. Competing under the SRO Motorsports America banner, the GR Cup Series is a thrilling single-make series where over 30 drivers push their identical GR86 Cup cars to the limit, competing for a million-dollar prize purse.

The Continental "GR CUP" slick and "GR CUP" EC Wet are the exclusive tires for the 2026 GR Cup Series.

Proudly Manufactured By

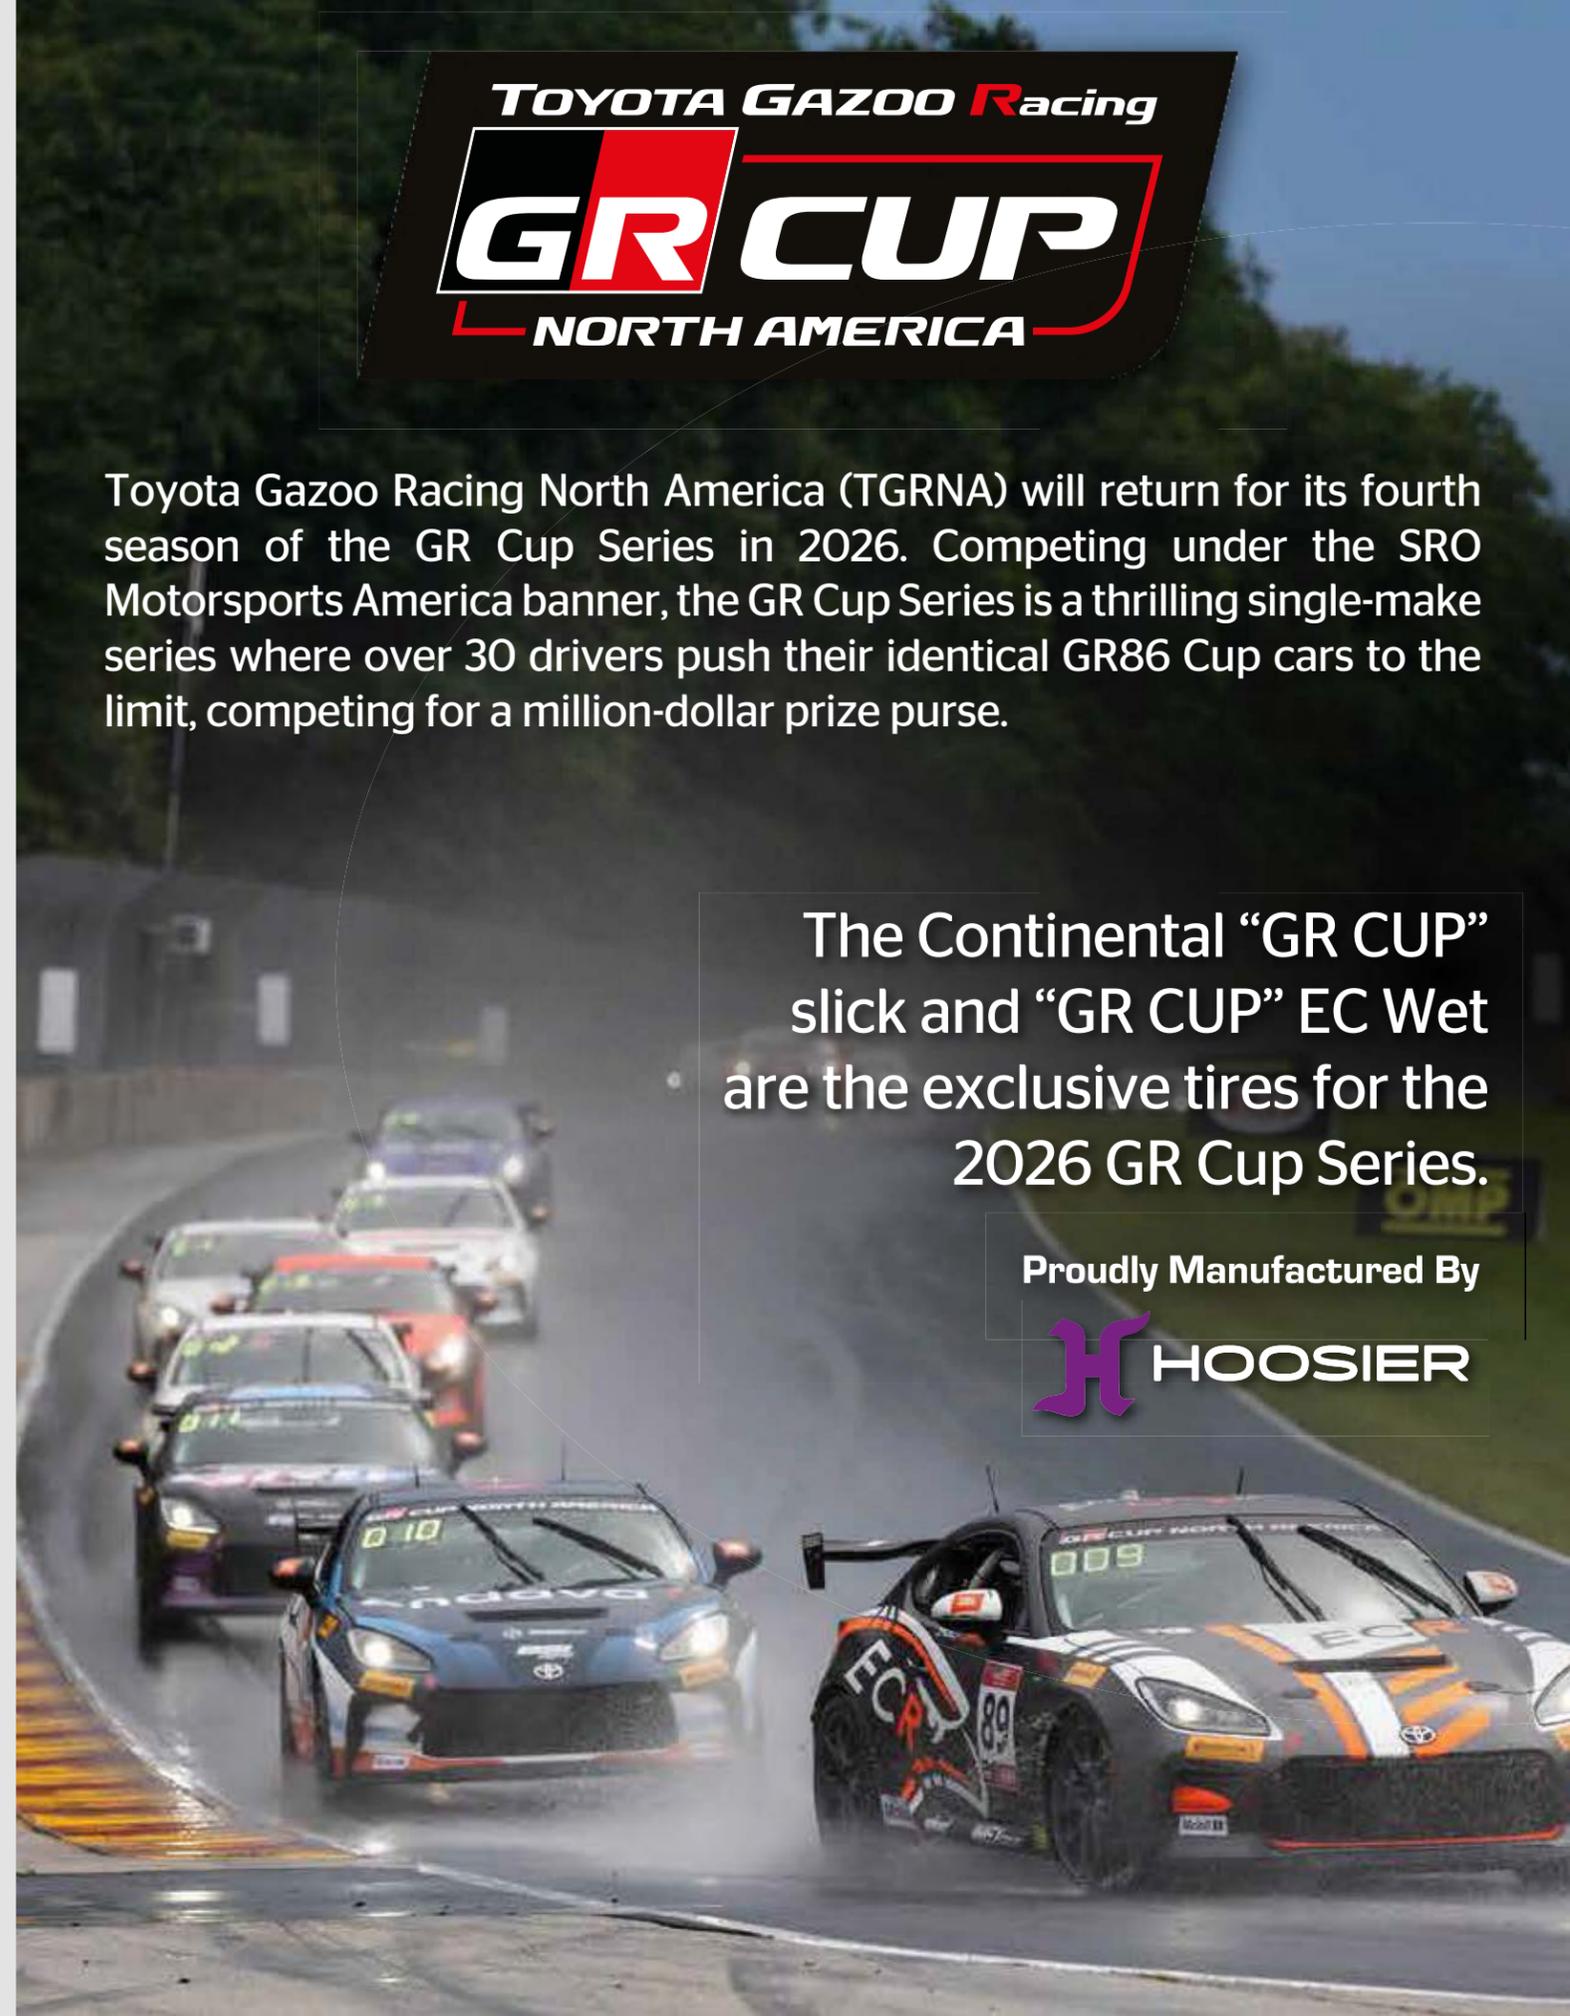

CIRCUIT RACING SLICKS – RADIAL (CONTINUED)

ITEM NUMBER	TIRE SIZE	APPLICATION	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
43698	365/720R16	GT1	13.9"	28.2"	88.5"	13"	13"	15.1"	S2
43712	200/610R17	GT CARS / CLUB	tbc	tbc	tbc	tbc	tbc	tbc	M
tbd	235/610R17	GT CARS / CLUB	tbc	tbc	tbc	tbc	tbc	tbc	M
43724	240/610R17	GT CARS / CLUB	9"	23.9"	75.1"	9"	9"	9.75"	MH
43726	235/620R17	NASA PROTOTYPE	8.8"	24.3"	76.5"	9"	9"	9.6"	NP01X
43822	240/640R18	GT CARS / CLUB	9.1"	25.6"	80.4"	8"-9.5"	9"	9.8"	M
43838	265/650R18	TCR / GT	10.1"	25.5"	80"	9"-10"	10"	10.9"	MH
43849	280/680R18	GT Cars / Club	10"	25.5"	80"	9"-11"	10	11.3"	MH
43850	285/650R18	GT Cars / Club	11"	25.5"	80.5"	10"-12"	11"	11.9"	MH
43894	355/650R18	GT1	13.5"	25.8"	81"	12"-13"	13"	14.1"	S1, S2
43898	365/720R18	GT1	14.5"	28.2"	88.6"	13"-14"	14"	16"	S1, S2

SOFT		COMPOUND								FIRM	
		US	SS1	S1	S	MS	M	S2	MH		

CIRCUIT RACING WETS – BIAS

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	APPLICATION
44115	18 x 6-10 W3	FSAE-WET	6.2"	17.8"	56"	6"-8"	6"	7.8"	F500, FSAE
44125	19.5 x 6.5-10 W3	CIRCUIT WET	6.2"	19.7"	62"	6"-8"	8"	8.2"	F500
44150	20 x 7.5-13 W3	CIRCUIT WET	7.4"	20.6"	64.6"	7"-8"	7"	8.3"	FA, P1, P2
44140	20 x 6.5-13 W3	CIRCUIT WET	6.1"	20.5"	64.5"	6"-7"	6"	7.2"	Sidecar
44185	21 x 6.5-13 W3	CIRCUIT WET	6.7"	21.2"	66.5"	6"-8"	6"	7.2"	FF, FM, FC, S2000, F1000
44196	22 x 8-13 W3	CIRCUIT WET	7.8"	22"	69"	8"	8"	8.9"	SCCA-FE, FC, F1000
44217	22 x 9-13 W3	CIRCUIT WET	9.6"	22.6"	71"	8.5"-10"	9"	10.6"	SCCA-FE, FC, FA, FM, P1, P2
44266	22.5 x 5-15 W3	CIRCUIT WET	5"	22"	69.2"	4"	4"	6.5"	FV
44307	27 x 10-15 Wet	VINTAGE WET	10"	27"	84"	10"-11"	10"	12.5"	HSC/GTA

CIRCUIT RACING WETS – RADIAL

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	APPLICATION
44335	200/540R13 W3	CIRCUIT RADIAL WET	7.4"	21.3"	66.8"	8"-9"	8"	9"	F4, P1, P2
44336	250/575R13 W3	CIRCUIT RADIAL WET	10"	22.6"	71"	10"-11"	10"	11.4"	F4, P1, P2
44421	185/60R13 W3	D.O.T. RADIAL WET	6.5"	21.7"	68"	5.5"	5.5"	7.5"	FF
44426	205/60R13 W3	D.O.T. RADIAL WET	7.4"	23.2"	72.5"	5.5"	5.5"	8.4"	FF
44511	23 x 9R-15 W3	CIRCUIT RADIAL WET	9.4"	23"	72.3"	10"	10"	10.7"	FA
44516	24.5 x 13R-15 W3	CIRCUIT RADIAL WET	13"	24.4"	76.6"	14"	14"	15.1"	FA
44593	330/700R15 WET	SC RADIAL WET	12.5"	27.6"	86.9"	10"-10.5"	10"	13"	NASCAR EURO/TA2/HSC
44670	25.5 x 12R-16 W2	CIRCUIT RADIAL WET	12.2"	25.7"	80.9"	12"	12"	13.2"	GT1
44690	28 x 12.5R-16 W2	CIRCUIT RADIAL WET	13.6"	27.3"	85.7"	12"	12"	14.2"	GT1
44442	20.5x7R13	SPORTS 2000 FRONT	7.3"	20.8"	65.2"	6"-7"	6"	7.6"	W3
44443	22.5x8R13	SPORTS 2000 REAR	8.3"	22.4"	70.3"	7"-8"	8"	9"	W3
44330	200/540R13 W3	CIRCUIT RADIAL WET	7.4"	21.3"	67"	8"-9"	9"	9.4"	F4, P1, P2
44333	250/575R13 W3	CIRCUIT RADIAL WET	10"	22.7"	71.3"	10"-11"	10"	10"	F4, P1, P2



PRESENTED BY Continental



USF Pro Championships Presented by Continental Tire is the premier driver development ladder in American open-wheel racing, built as a clear, scholarship-funded path to the NTT INDYCAR Series. Comprising three levels - USF Juniors, USF2000, and USF Pro 2000 - the USF Pro Championships provide structured progression and competitive experience on road courses, street circuits, and ovals.

Since its inception, the ladder has attracted talent from around the globe, with drivers from 37 countries and six continents represented.

The Continental "USF" slick and "USF" Rain are the exclusive tires for the USF Pro 2000, USF 2000 and USF Juniors Series.

Proudly Manufactured By



HISTORIC SPORTSCAR

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
43589	330/700R15	SLICK (RADIAL)	11.9"	27.7"	87.1"	10"-10.5"	10"	13"	Historic Stock Car-M
44391	19 x 5-10	T.D.R.	5.2"	18.8"	59"	5"-6"	5.5"	7.8"	HOOSIER T.D. R
44355	20.5 x 6-13	T.D.R.	6.2"	20.6"	64.7"	5"-7"	5"	7"	HOOSIER T.D. R
44365	22.5 x 6-13	T.D.R.	6.2"	22.4"	70.3"	5"-7"	5"	7.5"	HOOSIER T.D. R
44375	22.5 x 7.5-13	T.D.R.	7.8"	22.2"	69.6"	6.5"-8.5"	7"	9"	HOOSIER T.D. R
44415	23 x 6.5-14	T.D.R.	7.2"	23"	72.3"	5.5"-8"	5.5"	8.3"	HOOSIER T.D. R
44416	23 x 7.5-14	T.D.R.	7.8"	23"	72.5"	6"-9"	6"	8.8"	HOOSIER T.D. R
44561	23 x 6.5-15	T.D.R.	6.7"	23"	72.5"	5.5"-7"	6"	7.6"	HOOSIER T.D. R
44562	23 x 7.5-15	T.D.R.	7.6"	23"	72.5"	6.5"-8.5"	7.5"	8.5"	HOOSIER T.D. R
44563	24 x 7-15	T.D.R.	7"	24"	75.5"	6"-8.5"	6"	8.5"	HOOSIER T.D. R
44564	24 x 8.5-15	T.D.R.	8.5"	24"	75.5"	7"-9.5"	8"	10"	HOOSIER T.D. R
44566	25.5 x 8-15	T.D.R.	8"	25.2"	79.2"	7"-9"	6"	9.2"	HOOSIER T.D. R
44287	25.5 x 8.5-15	T.D.R.	8.5"	25.2"	79.2"	7"-10"	8"	10.3"	HOOSIER T.D. R
44297	25.5 x 10-15	T.D.R.	10"	25.8"	81"	8"-11"	8"	11.2"	HOOSIER T.D. R
44308	26.5 x 9.5-15	T.D.R.	9.5"	26.6"	83.5"	8"-10"	8"	11"	HOOSIER T.D. R
44309	26.5 x 11-15	T.D.R.	10.4"	27"	84.9"	9"-12"	12"	13.6"	HOOSIER T.D. R
44317	27.5 x 11-15	T.D.R.	11"	27.7"	87"	10"-13"	10"	13.2"	HOOSIER T.D. R
44380	22 x 7-13	VINTAGE	6.8"	20.9"	68.8"	5.5"-7.5"	5.5"	7.8"	VINTAGE WET-H20
44400	5-15	VINTAGE	5.2"	24.7"	77.6"	4"-6"	4"	7"	VINTAGE T.D.
44410	5.5-15	VINTAGE	6.5"	24.7"	77.6"	4.5"-7"	4.5"	7.7"	VINTAGE T.D.

HISTORIC FORMULA

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	MODEL	COMPOUND
43195	20 x 10-13	SLICK	10"	19.8"	62.4"	9"-11"	10"	11.6"	F5000	R20
43385	23.5 x 10.5-15	SLICK	10.8"	23.4"	73.6"	10"-12"	11.5"	13"	F5000/CanAm	R20
43320	26 x 15-13	SLICK	15"	26"	81.6"	15"-17"	15"	17.1"	F5000/CanAm	R20
43391	26 x 15-15	SLICK	15"	26"	81.6"	15"-17"	15"	17.1"	F5000/CanAm	R20
43570	240/580R15	SLICK (RADIAL)	9.4"	22.9"	72"	10"	10"	10.7"	Indy Lights	S
43578	330/620R15	SLICK (RADIAL)	13.5"	24.5"	76.5"	14"	14"	14.8"	Indy Lights	S
43575	275/650R15	SLICK (RADIAL)	10"	25.4"	79.8"	10"	10"	11.3"	Indy Car	MS
43596	350/700R15	SLICK (RADIAL)	13.4"	27.4"	86.2"	15"	15"	16"	Indy Car	MS
44165	135/545-13	VINTAGE	5.4"	21.3"	67"	5.5"	5"	6.6"	Formula Ford	VFF
44170	165/580-13	VINTAGE	6.8"	22.7"	71.2"	5.5"	6"	8.5"	Formula Ford	VFF
44206	21 x 9-13	VINTAGE	9.125"	20.9"	65.6"	10"	10"	10.5"	Formula B	R35B
44226	23 x 12-13	VINTAGE	13"	23.3"	73.25"	13"	13"	14.375"	Formula B	R35B
44405	120/590-15	VINTAGE	4.8"	22.6"	70.9"	4.5"	4.5"	6.1"	Formula Vee	VINTAGE T.D.
44408	135/620-15	VINTAGE	5.6"	24.1"	75.6"	4.5"	4.5"	6.9"	Formula Vee	VINTAGE T.D.



HISTORIC RADIAL

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH
46003	P205/60R13	SPEEDSTER	7.3"	22.7"	71.2"	5.5"-7"	6"	8.4"
46011	P185/65R15	SPEEDSTER	6.4"	24.2"	76"	5"-7"	5"	7"
46016	P205/60R15	SPEEDSTER	7.3"	24.2"	76"	5.5"-8"	6.5"	8.2"
46021	P225/50R15	SPEEDSTER	8.1"	24.2"	76"	6.5"-9"	7"	9.125"

HISTORIC CONTINENTAL

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	MODEL
44450	5T10	RENNER RACING	4.8"	19.6"	61.5"	5"-6"	5"	6.8"	T-Section
44452	4.50T12	RENNER RACING	4.7"	21.1"	66.3"	5"-6"	5"	6.9"	T-Section
44454	4.50T13	RENNER RACING	4.6"	22.2"	69.7"	5"-6"	5"	6.6"	T-Section
44456	5.50T13	RENNER RACING	5.2"	23.8"	74.7"	5"-6"	5.5"	8.3"	T-Section
44458	5.50T14	RENNER RACING	5.1"	24.7"	77.6"	5"-6"	5.5"	7.8"	T-Section
44460	4.50T15	RENNER RACING	4.1"	24"	75.4"	5"-6"	5"	6.3"	T-Section
44462	5T15	RENNER RACING	4.8"	24.7"	77.6"	5"-6"	6"	7.7"	T-Section
44464	5.50T15	RENNER RACING	5.1"	25.5"	80.1"	6"-7"	6.5"	8.2"	T-Section
44466	6T15	RENNER RACING	5.5"	26.7"	83.8"	6.5"-7.5"	7"	9.2"	T-Section
44468	6.50T15	RENNER RACING	5.8"	27.3"	85.7"	7"-8"	7.5"	9.9"	T-Section
44470	7T15	RENNER RACING	6.8"	27.6"	86.7"	8"-9"	8.5"	11"	T-Section
44472	6T16	RENNER RACING	5"	27.6"	86.7"	5.5"-6.5"	6"	8.3"	T-Section
44480	450W13	RENNER RACING	4.7"	21.7"	68.3"	4"-7.5"	5.5"	6.7"	W-Section
44482	525W13	RENNER RACING	5.6"	23.2"	73"	5"-8"	5.5"	8.1"	W-Section
44484	550W13	RENNER RACING	6.6"	23.8"	74.8"	6"-9"	8"	9.3"	W-Section
44486	550W14	RENNER RACING	5.6"	25.1"	79"	5.5"-9.5"	7"	8.5"	W-Section
44488	500W15	RENNER RACING	5.9"	25.5"	80"	5.5"-9"	7.5"	8.6"	W-Section
44490	550W15	RENNER RACING	6.5"	26.1"	82"	6"-8.5"	8"	9.4"	W-Section
44492	600W15	RENNER RACING	7"	22.9"	72"	7"-9"	8"	10"	W-Section
44494	650W15	RENNER RACING	7.7"	27.8"	87.5"	7.5"-10"	9"	11.3"	W-Section





Proudly Manufactured By



Continental Renner Racing FIA Appendix K homologated for Historic cars pre 1965

'Continental Renner Racing' was already at home on racetracks around the world in the 1960s and 1970s. The tire was developed to ensure safe, fair racing based on the strict specifications set down by the FIA.

The Continental Renner Racing tire, built exclusively in the United States by Hoosier Racing Tire, combines over 60 years of expertise with proven performance.

Engineered for precision and consistency, the Continental Renner Racing tire delivers reliable grip and ideal feedback lap after lap and empowers drivers with confidence on every circuit.

Extensively tested and developed within FIA technical specifications, it has been refined to meet the unique demands of historic vehicles while maintaining the highest standards of performance.



CONTINENTALTIRE.COM

TrackAttack RACE

ITEM NUMBER	TIRE SIZE	LOAD/SPEED RATING	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	A8	R8
46303	195/60ZR13	83W	TrackAttack RACE	6.9"	21.9"	68.7"	5"-7"	5.5"	7.8"		X
46314	215/60ZR13	89W	TrackAttack RACE	8"	22.8"	71.5"	6"-7.5"	7"	9.4"		X
46316	235/40ZR13	77W	TrackAttack RACE	8.5"	20.9"	65.8"	7"-8.5"	7.5"	9.3"	X	X
46323	255/40ZR13	82W	TrackAttack RACE	9.5"	20.9"	65.6"	8.5"-10"	9"	10.5"	X	
46504	205/50ZR15	84W	TrackAttack RACE	8"	22.8"	71.8"	5.5"-7.5"	6.5"	8.5"	X	X
46503	P205/50ZR15 SM7.5	84W	TrackAttack RACE	8"	22.8"	71.8"	5.5"-7.5"	6.5"	8.5"		X
46506	P205/50ZR15 RCES	84W	TrackAttack RACE	8"	22.8"	71.8"	5.5"-7.5"	6.5"	8.5"		
46512	225/45ZR15	81W	TrackAttack RACE	8.6"	22.8"	71.8"	7"-8.5"	7.5"	9.3"	X	X
46517	225/50ZR15	90W	TrackAttack RACE	8.8"	23.8"	74.8"	6"-8"	7"	9.7"		X
46523	245/40ZR15	83W	TrackAttack RACE	9"	23"	72"	7"-9"	8.5"	10"	X	X
46527	245/50ZR15	95W	TrackAttack RACE	9.4"	24.4"	76.2"	7"-9"	7.5"	10.3"		X
46537	275/35ZR15	82W	TrackAttack RACE	10.1"	23"	72.2"	9"-11"	9.5"	10.8"	X	X
46541	275/50ZR15	101W	TrackAttack RACE	10"	25.5"	80"	7.5"-9.5"	8"	10.8"		X
46561	295/35ZR15	86W	TrackAttack RACE	10.5"	23"	72.3"	9"-11"	10"	11.6"	X	X
46602	215/40ZR16	77W	TrackAttack RACE	8"	23"	72.1"	7"-8.5"	7"	8.5"	X	X
46612	225/50ZR16	91W	TrackAttack RACE	8.8"	24.7"	77.6"	7"-9"	7"	9.4"		X
46617	245/45ZR16	88W	TrackAttack RACE	9.5"	24.4"	76.5"	7.5-9"	8"	10.3"		X
46631	275/45ZR16	94W	TrackAttack RACE	10.3"	25.6"	80.5"	9"-11"	9"	11.2"		X
46702	215/40ZR17	79W	TrackAttack RACE	TBD	TBD	TBD	TBD	TBD	TBD		X
46704	215/40ZR17 SMX	81W	TrackAttack RACE	9"	23.8"	74.8"	7"-9"	8"	9.6"		X
46707	225/40ZR17	81W	TrackAttack RACE	9"	23.8"	74.8"	7"-9"	8"	9.6"	X	X
46709	225/45ZR17	84W	TrackAttack RACE	9"	24.7"	77.8"	7"-9"	7.5"	11"	X	X
46712	235/45ZR17	87W	TrackAttack RACE	TBD	TBD	TBD	TBD	TBD	TBD		
46717	245/40ZR17	86W	TrackAttack RACE	9.7"	24.3"	76"	8"-9.5"	8.5"	10.3"	X	X
46722	245/45ZR17	89W	TrackAttack RACE	9.3"	25.5"	80"	7.5"-9"	8"	10"		X
46728	275/35ZR17	85W	TrackAttack RACE	10.3"	24.7"	77.7"	9"-11"	9.5"	11"	X	X
46732	275/40ZR17	93W	TrackAttack RACE	10.3"	25.5"	80.1"	9"-11"	9.5"	11"	X	X
46736	315/35ZR17	93W	TrackAttack RACE	11.8"	25.6"	80.4"	11"-12"	11"	12.6"	X	X
46741	335/35ZR17	97W	TrackAttack RACE	12.9"	25.6"	80.5"	11"-13"	12"	13.6"	X	
46812	P225/40ZR18	83W	TrackAttack RACE	8.8"	24.7"	77.6"	7"-9"	8"	9.6"		X
46822	245/35ZR18	80W	TrackAttack RACE	9.4"	24.4"	76.7"	8"-9.5"	8.5"	9.9"	X	X
46827	245/40ZR18	88W	TrackAttack RACE	9"	25.4"	79.8"	8"-9.5"	8.5"	10.3"	X	X
46833	275/30ZR18	84W	TrackAttack RACE	10.3"	24.8"	77.8"	9"-11"	9"	10.8"	X	X
46837	275/35ZR18	84W	TrackAttack RACE	10.3"	25.5"	80.2"	9"-11"	9.5"	10.7"	X	X
46839	285/30ZR18	86W	TrackAttack RACE	10.9"	24.9"	78.1"	10"-12"	10"	11.5"	X	X
46841	295/30ZR18	88W	TrackAttack RACE	10.8"	25.3"	79.5"	10"-12"	10"	11.6"	X	X
46842	295/40ZR18	98W	TrackAttack RACE	10.4"	27.2"	85.6"	10"-12"	10.5"	11.9"		X
46848	315/30ZR18	91W	TrackAttack RACE	11.8"	25.6"	80.5"	11"-12"	11"	12.5"	X	X
46849	315/40ZR18	102W	TrackAttack RACE	11.3"	27.3"	85.7"	10.5"-12.5"	11"	13.2"		X
46852	335/30ZR18	95W	TrackAttack RACE	12.8"	25.6"	80.5"	12"-13"	12"	13.5"	X	X
46856	345/35ZR18	100W	TrackAttack RACE	13.2"	26.8"	84.2"	11"-13"	12"	13.9"	X	X
46917	235/35ZR19	79W	TrackAttack RACE	9.25"	25.6"	80.5"	8"-9.5"	9"	10.2"	X	X
46926	265/35ZR19	86W	TrackAttack RACE	9.6"	26.2"	82.3"	9"-10"	9"	10.4"	X	X
46930	295/30ZR19	89W	TrackAttack RACE	10.4"	26.1"	82.1"	10"-12"	10"	11.5"	X	X
46931	295/35ZR19	92W	TrackAttack RACE	10"	27.3"	86"	10"-12"	10"	11.5"		X
46934	315/30ZR19	93W	TrackAttack RACE	12"	26.1"	82.2"	11"-12"	11"	12.5"	X	X
46946	325/30ZR19	94W	TrackAttack RACE	12.2"	26.8"	84.1"	12"-13"	13"	13.6"	X	X
46951	345/30ZR19	98W	TrackAttack RACE	13"	26.8"	84.3"	12"-13"	13"	14.1"	X	X
46956	245/35ZR20	83W	TrackAttack RACE	9.1"	26.8"	84.3"	8"-10"	8.5"	9.8"		X
46966	265/30ZR20	84W	TrackAttack RACE	9.8"	26.7"	83.9"	9"-10"	9.5"	10.9"		X
46974	295/30ZR20	90W	TrackAttack RACE	10.6"	27.2"	85.5"	10"-12"	10.5"	11.7"		X
46978	305/30ZR20	92W	TrackAttack RACE	11.8"	27.1"	85.3"	11"-12"	12"	13.2"	X	X
46982	335/25ZR20	94W	TrackAttack RACE	12.8"	27.1"	85.5"	12"-13"	12"	13.5"	X	X

WARNING: DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

CIRCUIT RACING D.O.T. – RADIAL WET

ITEM NUMBER	TIRE SIZE	LOAD/SPEED RATING	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH
46101	P185/65R13 W2	84H	D.O.T. RADIAL WET	6.8"	22.2"	69.8"	5"-7"	5.5"	7.9"
46105	P205/60R13 W2	86H	D.O.T. RADIAL WET	7.2"	23.1"	72.5"	6"-7.5"	7"	9.3"
46126	P205/50R15 W2	84H	D.O.T. RADIAL WET	7.1"	23.5"	73.8"	5.5"-7.5"	6.5"	8.2"
46126	P205/50R15 SMW	84H	D.O.T. RADIAL WET	7.1"	23.5"	73.8"	5.5"-7.5"	6.5"	8.2"
46127	P225/45R15 W2	81H	D.O.T. RADIAL WET	8.9"	22.9"	72"	7"-8.5"	8"	9.4"
46140	P225/50R16 W2	91H	D.O.T. RADIAL WET	8.8"	24.8"	77.9"	7"-9"	7"	9.6"
46165	P215/40R17 W3	79H	D.O.T. RADIAL WET	8"	23.8"	74.6"	7"-8"	8"	8.9"
46165	P215/40R17 SMWX	79H	D.O.T. RADIAL WET	8"	23.8"	74.6"	7"-8"	8"	8.9"
46170	P225/45R17 W2	84H	D.O.T. RADIAL WET	8.8"	24.8"	77.9"	7"-9"	7.5"	9.5"
46175	P245/40R17 W2	86H	D.O.T. RADIAL WET	9"	24.8"	77.9"	8"-9.5"	8"	10"
46185	P275/40R17 W2	93H	D.O.T. RADIAL WET	10"	25.2"	79.2"	9"-11"	9.5"	11.3"
46205	P245/35R18 W2	80H	D.O.T. RADIAL WET	9"	24.8"	77.9"	8"-9.5"	8"	10"
46207	P245/40R18 W2	88H	D.O.T. RADIAL WET	8.75"	25.5"	80.25"	8"-9.5"	9"	9.75"
46215	P275/35R18 W2	87H	D.O.T. RADIAL WET	10"	25.2"	79.2"	9"-11"	9.5"	11.3"
46220	P305/30R18 W2	89H	D.O.T. RADIAL WET	11.8"	25.6"	80.4"	11"-12"	11"	12.7"


NOTE: H Speed rating = 130 mph/210 km/h

“RACING IS LIFE. ANYTHING BEFORE OR AFTER IS JUST WAITING.”

– Steve McQueen



WARNING: DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

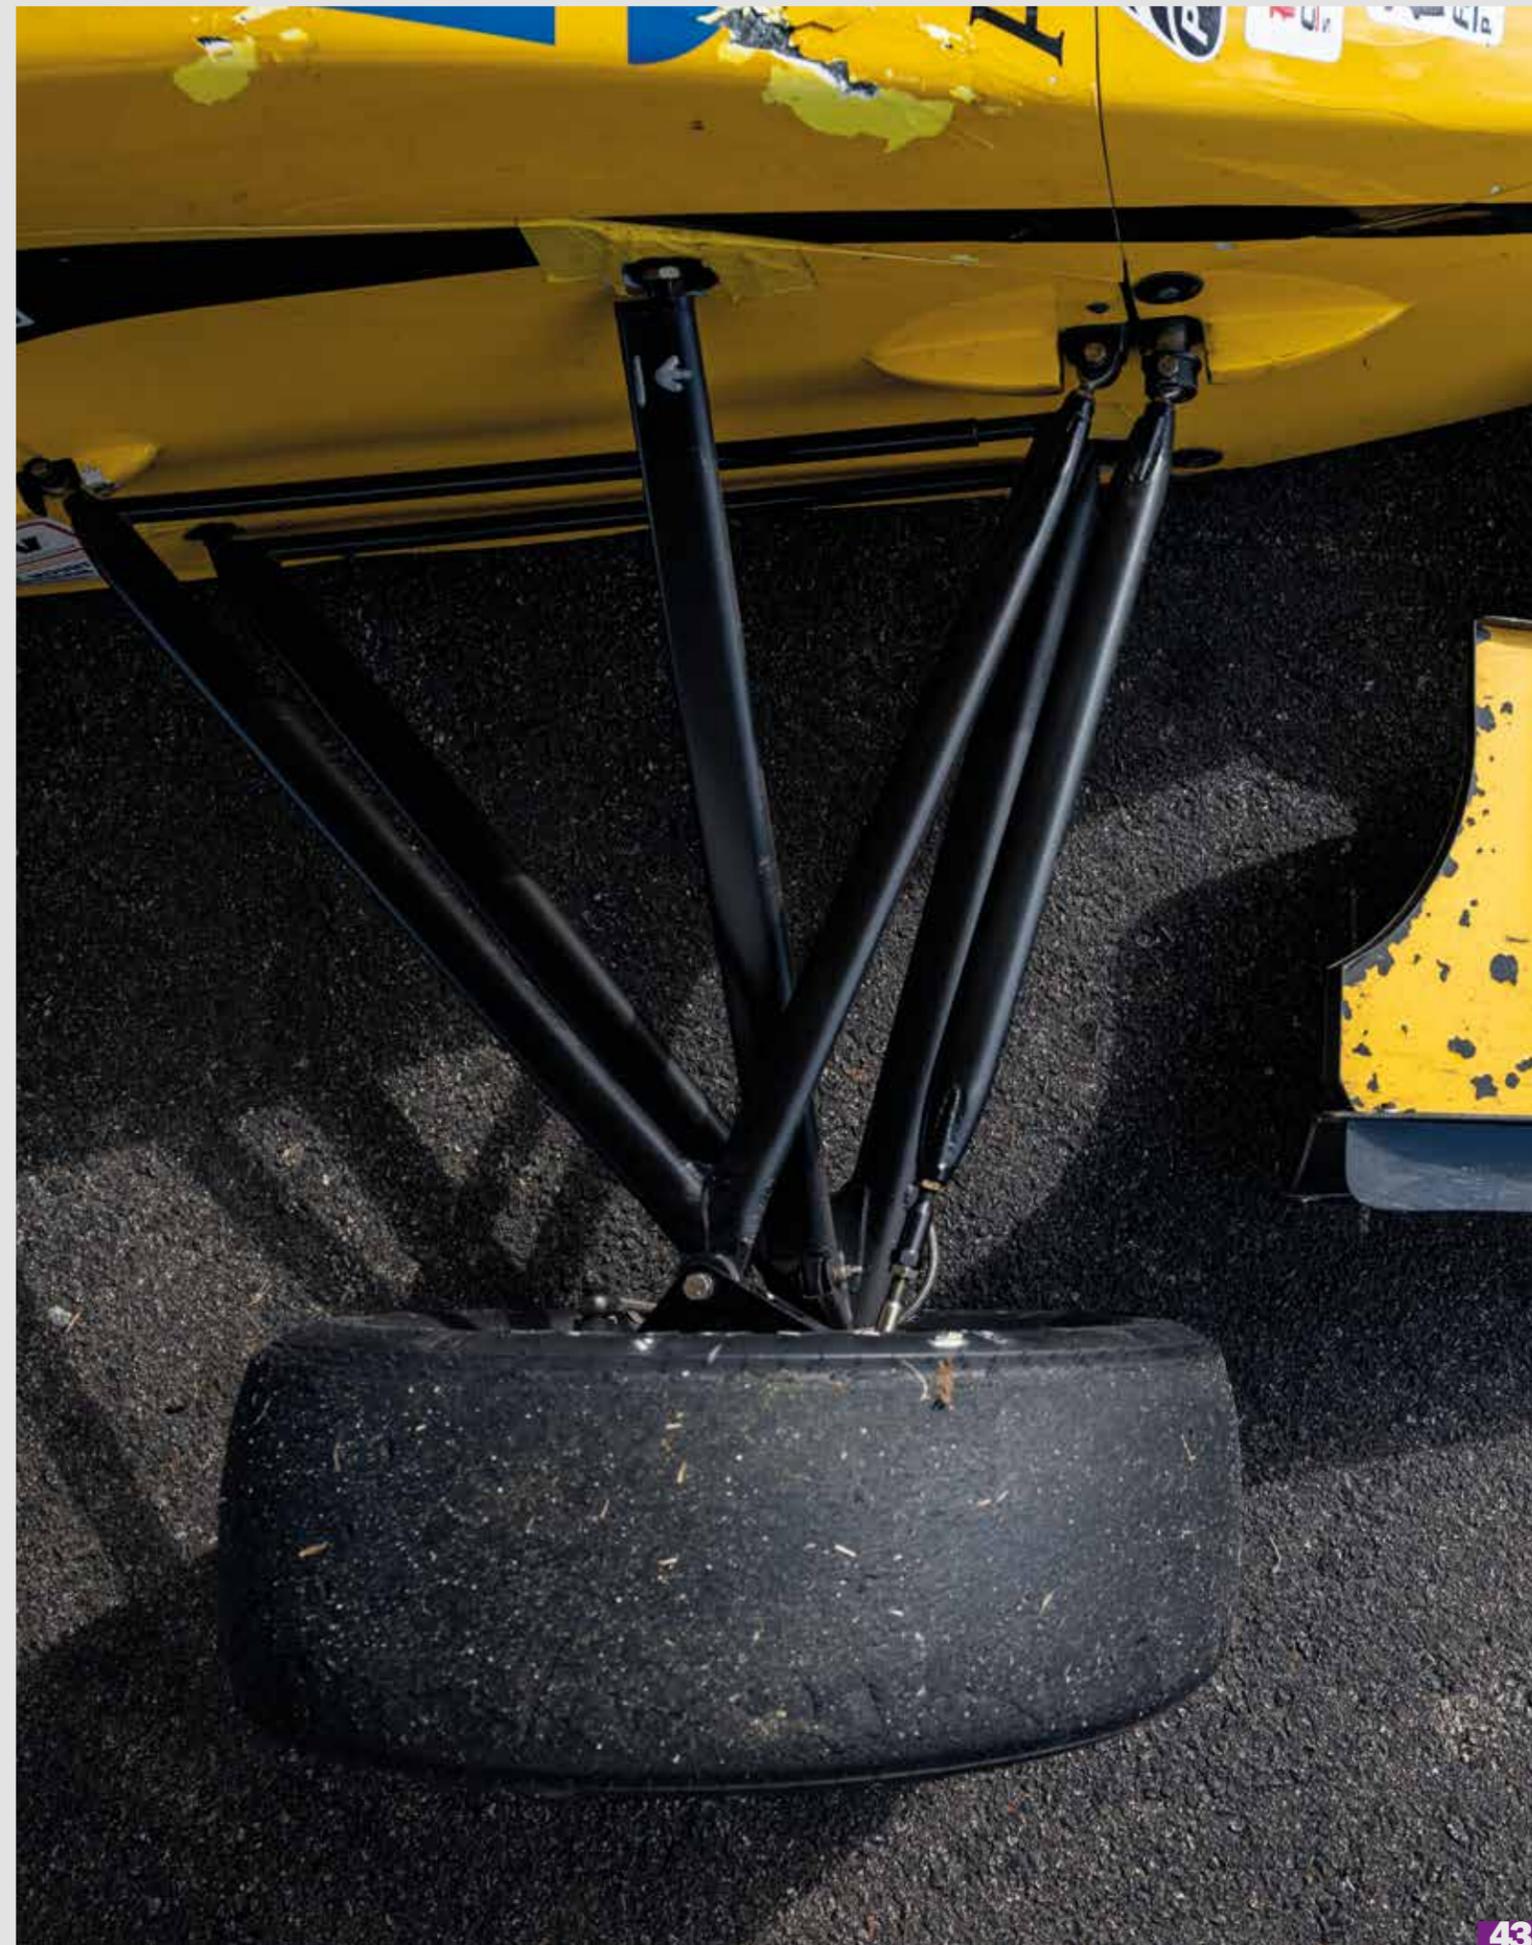

PERFORMANCE STREET



PRO STREET D.O.T. – RADIAL	46
SPOTLIGHT: PRO STREET	47
ECF	48
SPOTLIGHT: ECF	49
TRACK ATTACK PRO	50
SPOTLIGHT: TRACK ATTACK PRO	51

PRO STREET D.O.T. – RADIALS

ITEM NUMBER	TIRE SIZE	SPEED RATING	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	MAX LOAD	RATED INF. PSI	LOAD RANGE
19030	24 x 7.50R-15 LT	71H	PRO STREET	5.3"	23.2"	72.8"	5.5"-7"	6"	7.5"	760	35	B
19040	25 x 7.50R-15 LT	75H	PRO STREET	5.3"	24.3"	76.4"	5.5"-7"	6"	7.5"	855	35	B
19050	26 x 7.50R-15 LT	79H	PRO STREET	5.3"	25.3"	80.3"	5.5"-7"	6"	7.5"	965	35	B
19055	26 x 7.50R-17 LT	74H	PRO STREET	5.3"	25.4"	80.4"	5.5"-7"	6"	7.5"	825	35	B
19070	27 x 9.50R-15 LT	86H	PRO STREET	8"	26.5"	84"	6.5"-8.5"	8"	10"	1325	35	B
19075	27 x 10.50R-15 LT	88H	PRO STREET	8.3"	26.1"	82.4"	7"-9"	8.5"	10.5"	1235	35	B
19155	29 x 12.50R-15 LT	97H	PRO STREET	10.2"	29.1"	91.5"	9"-11.5"	10"	13"	1610	35	C
19200	29 x 15.50R-15 LT	99H	PRO STREET	12.1"	28.7"	91.5"	11"-14"	12"	15.3"	1710	35	C
19250	29 x 18.50R-15 LT	101H	PRO STREET	14.6"	28.4"	90.8"	13"-16.5"	14"	18"	1820	35	C
19275	31 x 12.50R-15 LT	103H	PRO STREET	10.3"	30.5"	96"	9"-11.5"	10"	13.5"	1930	35	C
19276	31 x 12.50R-16 LT	101H	PRO STREET	10.3"	30.5"	96"	9"-11.5"	10"	12.8"	1820	35	C
19300	31 x 16.50R-15 LT	106H	PRO STREET	12.8"	30.6"	96.2"	11.5"-15"	12"	16"	2095	35	C
19350	31 x 18.50R-15 LT	108H	PRO STREET	14.5"	30.6"	96.2"	13"-16.5"	14"	18"	2205	35	C
19390	32 x 21.50R-15 LT	110H	PRO STREET	16.8"	31.7"	100"	15"-19.5"	17"	21.5"	2680	35	C

NOTE: H Speed rating = 130 mph/210 km/h

”THERE ARE ONLY THREE REAL SPORTS: MOUNTAIN CLIMBING, BULL FIGHTING, AND MOTOR RACING. ALL THE REST ARE MERELY GAMES.”

– Ernest Hemingway



WARNING: Pro Street Tires are designed for highway use and are not suitable for racing purposes.

PRO STREET

Born on the track. Built for the street.

The Hoosier Pro Street Radial brings decades of racing dominance to your rear wheels, delivering the kind of grip, stance, and street presence that turns heads and hooks pavement. Trusted by Pro Street builders and muscle car purists alike, this tire doesn't just perform, it proves a point.

Refined for a clean, aggressive look, the Pro Street Radial keeps your ride planted without sacrificing comfort or control. Its steel-belted radial construction crushes the limitations of bias-ply tires, offering highway stability and ride quality that's as serious as your build.

With subtle black sidewall markings, the Pro Street Radial blends seamlessly into your custom build. For proven performance and unmistakable style, drive the Hoosier Pro Street Radial.



H HOOSIER



EXTREME CONTACT FORCE

CONTI ARTICLE	HOOSIER ITEM	TIRE SIZE	LOAD RATING	SPEED RATING	LOAD RANGE	TIRE DIAM.	CIRCUMFERENCE	TREAD WIDTH	SECTION WIDTH	RIM WIDTH	TREAD DEPTH	WEIGHT	RIM WIDTHS	MAX INFLAT.	REVS P. MILE	UTQG
03122340	45515CF	205/50 R 15	89	V	XL	23.1	72,6	7"	8,4"	7"	7	19.5 lbs.	5.5-7.5	51	900	200AA
03122350	45530CF	225/45 R 15	87	V	SL	23	71,6	8"	9,2"	8"	7	20.1 lbs.	7-8.5	51	904	200AA
03134560	45545CF	245/40 R 15	92	V	XL	23	71	9"	10"	9"	7	20.8 lbs.	8-9.5	51	917	200AA
03122250	45710CF	225/40 ZR 17	90	W	XL	24	75,7	8"	9,3"	8"	7	21 lbs.	7.5-9	51	862	200AA
03122360	45715CF	225/45 ZR 17	94	W	XL	25	78,7	8"	9,2"	8"	7	26.1 lbs.	7-8.5	51	829	200AA
03122370	45730CF	245/40 ZR 17	95	W	XL	25	78	9"	10"	9"	7	23 lbs.	8-9.5	51	840	200AA
03122390	45740CF	255/40 ZR 17	98	W	XL	25	78,7	9"	10,5"	9"	7	24.3 lbs.	8.5-10	51	830	200AA
03134570	45750CF	275/35 ZR 17	98	W	XL	25	77	10"	11,1"	10"	7	24.7 lbs.	9-11	51	847	200AA
03122260	45810CF	245/35 ZR 18	92	W	XL	25	77,8	9"	10,1"	9"	7	23.2 lbs.	8-9.5	51	839	200AA
03122380	45820CF	245/40 ZR 18	97	W	XL	26	81	9"	10"	9"	7	24.5 lbs.	8-9.5	51	808	200AA
03122410	45830CF	275/35 ZR 18	99	W	XL	26	80,1	10"	11,1"	10"	7	25.9 lbs.	9-11	51	812	200AA
03122270	45840CF	295/30 ZR 18	98	W	XL	25	78,4	11"	12,1"	11"	7	26.5 lbs.	10-11	51	832	200AA
03200006	45850CF	295/40 ZR 18	103	W	SL	27	85,8	11"	12,1"	11"	7	29.3 lbs.	10.5-11.5	51	738	200AA
03122420	45860CF	315/30 ZR18	98	W	SL	25	79,7	12"	12,8"	11"	7	28.8 lbs.	10.5-11.5	51	817	200AA
03134580	45865CF	335/30 ZR 18	106	W	XL	26	81,6	12"	13,4"	12"	7	30.2 lbs.	11.5-12.5	51	800	200AA
03122280	45870CF	345/35 ZR 18	109	W	SL	28	86,4	13"	13,8"	12"	7	33.7 lbs.	11.5-13.5	51	755	200AA
03122290	45910CF	235/35 ZR 19	91	W	XL	26	80,2	8"	9,8"	9"	7	22.7 lbs.	8-9.5	51	815	200AA
03122400	45920CF	265/35 ZR 19	98	W	XL	26	82,7	10"	11"	10"	7	26.3 lbs.	9-10.5	51	790	200AA
03122300	45945CF	295/30 ZR 19	100	W	XL	26	81,7	11"	12,1"	11"	7	27.8 lbs.	10-11	51	800	200AA
03122310	45960CF	315/30 ZR 19	104	W	XL	27	83,4	12"	12,8"	11"	7	30.3 lbs.	10.5-11.5	51	786	200AA
03122320	45970CF	325/30 ZR 19	105	W	XL	27	83,8	12"	13,1"	11"	7	30.4 lbs.	11-12	51	779	200AA
03122330	45980CF	345/30 ZR 19	109	W	XL	27	85,2	13"	13,8"	12"	7	33.7 lbs.	11.5-12.5	51	765	200AA
03129980	45892CF	245/35 ZR 20	95	Y	XL	27	84,3	9"	10"	9"	7	24.9 lbs.	8-9	49	776	200AA
03129990	45984CF	265/30 ZR 20	94	Y	XL	27	83,1	10"	11"	10"	7	26 lbs.	9-10.5	49	787	200AA
03130000	45986CF	295/30 ZR 20	101	Y	XL	27	85,2	11"	12,1"	11"	7	29.1 lbs.	10-11	51	767	200AA
03130020	45988CF	305/30 ZR 20	103	Y	XL	27	86,1	11"	12,6"	11"	7	29.9 lbs.	10.5-11.5	51	759	200AA
03130030	45990CF	335/25 ZR 20	99	Y	SL	27	83,6	13"	13,6"	12"	7	31.2 lbs.	11.5-12.5	51	782	200AA
03130040	45992CF	345/25 ZR 20	100	Y	SL	27	83,5	13"	14,1"	13"	7	31.3 lbs.	12-13	51	782	200AA



ExtremeContact Force

The ExtremeContact Force is a stylish summer ultra-high performance competition tire for both enthusiasts and professionals. Ideal for endurance racing, this tire comes complete with SportPlus Technology, which provides responsive handling, better grip on wet roads, and extended tread life.

Benefits

- Consistent lap times
- Predictable on track
- Designed for dry and wet conditions
- Exceptional tread life
- Qualifies for 200 UTQG competition
- Designed for track and street use

Technologies and Features

SportPlus Technology

- Provides responsive handling
- Grips better on wet roads
- Extends tread life

UTQG - All Sizes

Treadwear	Traction	Temperature
200	A	A
Rim Diameter		
15 - 20		
Aspect Ratio		
30 - 50		
Speed Rating		
V, W		



Fully street legal / DOT approved

Proudly Developed By



TrackAttack PRO

ITEM NUMBER	Size	Load / Speed	Load ID	Tread Depth	Approved rim range	Inflated OD mm.	Inflated OD in.	Inflated Section mm.	Inflated Section in.	Inflated tread mm	Inflated tread in.	Max. Load [kg/lb]	Max. Pressure	UTQG	Weight [lb]
47503	205/50ZR15	89V	TA PRO	5,3	5.5-7.5	591	23,3	213	8,4	186	7,3	580/1279	51	200 A A	17,7
47511	225/45ZR15	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47706	225/40ZR17	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47711	225/45ZR17	94W	TA PRO	5,3	7-8.5	629	24,8	227	8,9	210	8,3	670/1477	51	200 A A	19,5
47716	245/40ZR17	95W	TA PRO	5,3	8-9.5	632	24,9	248	9,8	220	8,7	690/1521	51	200 A A	19,8
47724	255/40ZR17	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47820	245/35ZR18	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47822	245/40ZR18	97Y	TA PRO	5,3	8-9.5	658	25,9	241	9,5	217	8,5	730/1610	51	200 A A	20,2
47830	265/35ZR18 (97Y)	TA PRO	TA PRO	5,3	9-10.5	652	25,7	263	10,4	231	9,1	730/1610	51	200 A A	21,5
47832	265/40ZR18	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47836	275/35ZR18 (99Y)	TA PRO	TA PRO	5,3	9-11	650	25,6	277	10,9	252	9,9	775/1709	51	200 A A	22,4
47840	295/30ZR18 (98Y)	TA PRO	TA PRO	5,3	10-11	643	25,3	297	11,7	276	10,9	750/1654	51	200 A A	23,2
47844	295/35ZR18 (103Y)	TA PRO	TA PRO	5,3	10-11.5	668	26,3	296	11,7	272	10,7	875/1929	51	200 A A	23,7
47846	295/40ZR18	103W	TA PRO	5,3	10-11.5	698	27,5	301	11,9	267	10,5	875/1929	51	200 A A	24,8
47854	315/30ZR18 (98Y)	TA PRO	TA PRO	5,3	10.5-11.5	652	25,7	318	12,5	305	12	750/1654	51	200 A A	25,6
47858	335/30ZR18 (102Y)	TA PRO	TA PRO	5,3	11.5-12.5	664	26,1	334	13,1	314	12,4	850/1874	51	200 A A	25,8
47910	235/35ZR19	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47914	245/35ZR19 (93Y)	TA PRO	TA PRO	5,3	8-9.5	660	26	242	9,5	221	8,7	650/1433	51	200 A A	20,5
47922	265/30ZR19	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47924	265/35ZR19 (98Y)	TA PRO	TA PRO	5,3	9-10.5	667	26,3	265	10,4	242	9,5	750/1654	51	200 A A	21,6
47926	265/40ZR19	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47930	275/35ZR19 (100Y)	TA PRO	TA PRO	5,3	9-11	680	26,8	268	10,6	243	9,6	800/1764	51	200 A A	23,2
47934	285/35ZR19 (103Y)	TA PRO	TA PRO	5,3	9.5-11	688	27,1	290	11,4	258	10,2	875/1929	51	200 A A	23,9
47938	295/30ZR19 (100Y)	TA PRO	TA PRO	5,3	10-11	666	26,2	301	11,9	273	10,7	800/1764	51	200 A A	23,9
47940	295/35ZR19	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47944	305/30ZR19 (102Y)	TA PRO	TA PRO	5,3	10.5-11.5	671	26,4	313	12,3	279	11	850/1874	51	200 A A	24,3
47948	315/30ZR19 (104Y)	TA PRO	TA PRO	5,3	10.5-11.5	678	26,7	309	12,2	290	11,4	900/1985	51	200 A A	25
47950	325/30ZR19 (105Y)	TA PRO	TA PRO	5,3	11-12	683	26,9	329	13	306	12,1	925/2040	51	200 A A	26,2
47954	345/30ZR19	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47960	245/30ZR20	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47962	245/35ZR20 (95Y)	TA PRO	TA PRO	5,3	8-9.5	685	27	248	9,8	220	8,7	690/1521	51	200 A A	21,5
47964	265/30ZR20 (94Y)	TA PRO	TA PRO	5,3	9-10	673	26,5	268	10,6	245	9,7	670/1477	51	200 A A	22,2
47966	265/35ZR20 (99Y)	TA PRO	TA PRO	5,3	9-10.5	699	27,5	269	10,6	238	9,4	775/1709	51	200 A A	23,1
47968	275/30ZR20 (97Y)	TA PRO	TA PRO	5,3	9-10	679	26,7	271	10,7	247	9,7	730/1610	51	200 A A	23,1
47970	285/30ZR20 (99Y)	TA PRO	TA PRO	5,3	9.5-10.5	685	27	283	11,2	261	10,3	775/1709	51	200 A A	23,5
47974	295/30ZR20 (101Y)	TA PRO	TA PRO	5,3	10-11	691	27,2	296	11,6	268	10,6	825/1819	51	200 A A	24,2
47978	305/30ZR20 (103Y)	TA PRO	TA PRO	5,3	10.5-11.5	697	27,4	309	12,2	279	11	875/1929	51	200 A A	25,6
47982	315/30ZR20	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47984	315/35ZR20	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47986	325/30ZR20	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47987	325/35ZR20	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47988	335/25ZR20 (103Y)	TA PRO	TA PRO	5,3	11.5-12.5	681	26,8	335	13,2	310	12,2	875/1929	51	200 A A	26,1
47994	325/30ZR21	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
47998	345/25ZR21	TBD	TA PRO	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD

TrackAttack PRO



TRACK ATTACK PRO

For drivers who live life on the edge, the TrackAttack Pro takes track dominance to the street.

- Engineered for track dominance and street performance with Hoosier Racing DNA
- UTQG 200 rated Extreme Performance Summer tire
- Addictive levels of responsiveness and handling
- Unrivaled grip derived from motorsports-proven compounds
- Adrenaline fueled acceleration fused with dynamic braking



Extra-wide shoulder ribs maximize cornering performance

Featherlight construction provides peak responsiveness

H-DNA technology: 65+ years of Hoosier Racing DNA

Optimized center rib for increased braking performance

Motorsports derived compound



CONQUER. EVERY. DRIVE.

- H-DNA Technology
- Superior Cornering
- Podium Proven
- Improved Lap Times
- UHP Extreme Performance Summer
- Featherlight Construction



CONQUER. EVERY. DRIVE.

TRACKATTACKPRO.COM



*TrackAttack PRO is USDOT street legal only
HoosierTire.com



RALLY

SPOTLIGHT: WRX

54
55

RALLY									
ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
48004	185/70R13	GRAVEL RALLY-RIGHT	5.8"	23.5"	74"	7"	7"	8.2"	MED, HARD
48005	185/70R13	GRAVEL RALLY-LEFT	5.8"	23.5"	74"	7"	7"	8.2"	MED, HARD
48006	185/65R15	GRAVEL RALLY-RIGHT	6.5"	24.8"	78"	6"	6"	7.4"	MED, HARD
48007	185/65R15	GRAVEL RALLY-LEFT	6.5"	24.8"	78"	6"	6"	7.4"	MED, HARD
48008	195/65R15	GRAVEL RALLY-RIGHT	6.7"	25.2"	79"	7"	6"	7.7"	MED, HARD
48009	195/65R15	GRAVEL RALLY-LEFT	6.7"	25.2"	79"	7"	6"	7.7"	MED, HARD
48010	205/65R15	GRAVEL RALLY-RIGHT	7.1"	25.3"	79.5"	7"	7"	8.75"	MED, HARD
48011	205/65R15	GRAVEL RALLY-LEFT	7.1"	25.3"	79.5"	7"	7"	8.75"	MED, HARD
48300	195/50R13 TW1	TW1	6.9"	20.8"	65.3"	7"	7"	7.8"	W
48310	195/50R13 TD1	TD1	6.9"	20.8"	65.5"	7.5"	7"	7.6"	W,S
48320	195/50R13 TD1	TD1	6.9"	20.8"	65.5"	7.5"	7"	7.6"	M,H
48350	225/45R13 TW1	TW1	8.6"	20.9"	65.8"	7.5"	7.5"	8.8"	W
48360	225/45R13 TD1	TD1	7.8"	20.8"	65.5"	7.5"	7.5"	8.5"	W,S
48370	225/45R13 TD1	TD1	7.8"	20.8"	65.5"	7.5"	7.5"	8.5"	M,H
48500	195/50R15 TW1	TW1	7"	22.8"	71.5"	6.5"	6.5"	7.6"	W
48520	195/50R15 TD1	TD1	7.2"	22.8"	71.5"	6"	6.5"	7.8"	M,H
48570	195/50R15 TD1	TD1	7.2"	22.8"	71.5"	6"	6.5"	7.8"	W,S
48550	225/45R15 TW1	TW1	8.3"	23"	72.2"	7"	7"	8.6"	W
48560	225/45R15 TD1	TD1	7.5"	22.7"	71.5"	7.5"	7"	8.6"	W,S
48570	225/45R15 TD1	TD1	7.5"	22.7"	71.5"	7.5"	7"	8.6"	M,H
48600	195/50R16 TW2	TW2	7"	23.6"	74.1"	6"	6"	7.6"	W
48610	195/50R16 TD2	TD2	7.6"	23.7"	74"	6"	6.5"	7.8"	US,S
48620	195/50R16 TD2	TD2	7.6"	23.7"	74"	6"	6.5"	7.8"	M,H
48700	195/50R17 TW2	TW2	7"	24.6"	77.4"	6"	6"	7.4"	W
48710	195/50R17 TD2	TD2	7.6"	24.6"	77.1"	7"	7"	7.9"	US,S
48720	195/50R17 TD2	TD2	7.6"	24.6"	77.1"	6"	7"	7.9"	H,M
48800	225/40R18 TW3	TW3	8.2"	25.3"	79.5"	8"	8"	8.6"	W
48810	225/40R18 TD2	TD2	8.6"	25.3"	79.4"	8"	8"	9"	S
48820	225/40R18 TD2	TD2	8.6"	25.3"	79.4"	8"	8"	9"	M,H
48100	235/45 R17	RX Dry	8.9"	25.2"	79.1"	8-8.5"	8"	9.7"	RX
48105	235/45 R17	RX Wet	9.5"	24.3"	76.3"	8-8.5"	8"	9.8"	WET



Official Tire Supplier of the FIA World Rallycross Championship



OFF ROAD



DIRT BIKE

ATV / 3 WHEELER

UTV / SXS

SPOTLIGHT: CAR CARE HOOSIER MOMMA / HOOSIER DADDY

SPOTLIGHT: APPAREL

57
58
59
60-61
62-63

DIRT BIKE

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND	APPLICATION
07000	60/100-10	MOTOCROSS FRONT	2.75"	48"	1.5"	1.5"	2.75"	MX30	50cc JR Front
07005	60/100-12	MOTOCROSS FRONT	2.70"	53.75"	1.5"	1.5"	2.70"	MX30	50cc SR Front
07010	70/100-10	MOTOCROSS REAR IMX	3.12"	48.75"	1.5"	1.5"	3.12"	IMX30	50cc Rear
07015	60/100-14	MOTOCROSS FRONT	2.63"	60.5"	1.4"	1.4"	2.375"	MX30	65cc Front
07020	80/100-12	MOTOCROSS FRONT	3.70"	57.75"	1.6"	1.6"	3.70"	IMX30	65cc Rear
07025	70/100-17	MOTOCROSS FRONT	3.20"	72.75"	1.4"	1.4"	2.70"	MX30	85cc Front
07030	90/100-14	MOTOCROSS REAR IMX	4.5"	68.5"	1.6"	1.6"	3.65"	IMX30	85cc Rear
07113	80/100-21 C100	MOTOCROSS FRONT	3.86"	88.75"	1.6"	1.6"	3.86"	MX25S, MX30S	125, 250, 450cc
07114	80/100-21	MOTOCROSS FRONT	3.70"	87.75"	1.6"	1.6"	3.70"	MX25F, MX30F	125, 250, 450cc
07180	110/100-18	MOTOCROSS REAR IMX	4.70"	84.5"	1.85"-2.15"	2.15"	4.70"	IMX25, IMX30	125, 250, 450cc
07193	110/90-19 C100	MOTOCROSS REAR IMX	4.65"	88.75"	1.85"-2.15"	2.15"	4.65"	IMX20, IMX25, IMX30	125, 250, 450cc
07203	120/80-19 C100	MOTOCROSS REAR IMX	5"	85.75"	1.85"-2.15"	2.15"	5"	IMX20, IMX25, IMX30	250, 450cc
07218	120/90-18	MOTOCROSS REAR IMX	5.10"	84.875"	2.15"	2.15"	5.10"	IMX30	250, 450cc
07219	120/90-18 C100	MOTOCROSS REAR IMX	5.10"	84.75"	2.15"	2.15"	5.10"	IMX25, IMX30	250, 450cc
07250	120/80-19	MOTOCROSS REAR HMX	5.10"	86.5"	2.15"	2.15"	5.10"	HMX, SPEC	250, 450cc
07280	110/100-18	SOFT TERRAIN	5"	85.125"	1.85"-2.15"	2.15"	4.10"	ST1	125, 250, 450cc
07300	110/90-19	SOFT TERRAIN	4.875"	86"	2.15"	2.15"	3.875"	ST1	125, 250, 450cc
07501	130/80-19	FLAT TRACK FRONT	5"	85.125"	2.25"-3"	2.4"	4.75"	FT30, FT40, FT50	Flat Track
07551	140/80-19	FLAT TRACK FRONT	5.65"	87"	2.75"-3.50"	3"	5.20"	FT30, FT40, FT50	Flat Track



ATV / 3 WHEELER

ITEM NUMBER	TIRE SIZE	PLY RATING	TREAD PATTERN	TREAD WIDTH	APPROX. DIA	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND	APPLICATION
11940	12x 8-6	NA	TREADED CROSSBLOCK	8"	12"	37.5"	9"-10"	10"	9.75"	D10A, D20A	Youth ATV Rear
11960	12x 9-6	NA	TREADED CROSSBLOCK	9"	12"	38.5"	9"-10"	10"	10.25"	D10A, D20A, D30A	Youth ATV Rear
16105	21x 6-10	NA	RIB	7"	21"	66"	6"-8"	7"	8.25"	T20	3 Wheeler Front
16110	18x11-10	NA	WIDE TRI-TRAC	10"	18"	57"	10"	10"	11"	T10, T20	Flat Track & TT
16115	18x10-10	NA	TRI-TRAC	9"	18"	57"	9"-10"	9"	10.5"	RD20, RD30	Flat Track & TT
16130	18.5x 6-10	NA	TRI-TRAC FRONT	6"	18.5"	59"	5"	5"	7.5"	T10	Flat Track & TT
16250	18x 5.5-10	NA	ATV FRONT	5.5"	18"	57-58"	5"	5"	6.6"	D12, RD20	Flat Track & TT
16275	18.5x 8-10	NA	LARGE CROSSBLOCK	8.5"	18.5"	59"	8"	8"	9.5"	RD20	Flat Track & TT
16300	18x10-10	NA	LARGE CROSSBLOCK	10"	18"	58"	9"-10"	10"	11"	RD12, RD20, RD30	Flat Track & TT
16325	18.5x10-10	NA	LARGE CROSSBLOCK	10"	18.5"	59"	10"	10"	10.9"	D10	Flat Track & TT
16600	20.5x 6-10	NA	MX FRONT	5"	20.5"	63.25"	5"	5"	6.5"	MX 150	MX Front
16700	18x10-8	NA	MX REAR	8.5"	18"	56.5"	8"	8"	9.625"	MX150, MX200	MX Rear
16805	21x 7-10	6 PLY	ATV FRONT	6.75"	20.5"	64.5"	5"	5"	7"	XC200	ATV Front
16900	20x11-9	6 PLY	ATV REAR	9.75"	20"	62.5"	8"	8"	10.75"	XC200	ATV Rear
16910	20x11-9	6 PLY	ATV REAR	9.75"	20"	62.5"	8"	8"	10.75"	XC175	ATV Rear
42400	15/ 6-8	NA	ATV FRONT	6"	15"	49"	6"	6"	7.4"	D12, RD20	Flat Track & TT
42450	15/ 7-8	NA	SMALL CROSSBLOCK	7"	15"	49"	6"	6"	7.5"	RD20	Flat Track & TT
42500	15/ 8-8	NA	SMALL CROSSBLOCK	8"	15"	49.5"	7"	7"	8.5"	RD20, RD25	Flat Track & TT
42550	16/ 8.5-8	NA	SMALL CROSSBLOCK	8.5"	16"	53.5"	9"	9"	10.5"	RD20	Flat Track & TT

UTV / SXS

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND	APPLICATION
49400	27.5/8-15	SUPER CHAIN LINK	8"	27.75"	87"	7"-8"	8"	10.5"	M500	Prod 1000/PS
49470	27/9-15	KNOBBY	9"	27"	84.25"	7"-8"	8"	9.75"	M550	Short Course
16510	30/10-15	KNOBBY	10"	30"	92.5"	7"-8"	8"	10.25"	M550	Short Course

SOFT		COMPOUND												FIRM	
D10		RD12		D12	RD15	RD20	RD25	RD30	M500	M550	MX200	XC200	H500	T30	
D10A						D20A		D30A	MX150	XC175					
						T10		T20							



“NO ONE WANTS TO QUIT WHEN HE’S LOSING, AND NO ONE WANTS TO QUIT WHEN HE’S WINNING.”

- Richard Petty



TRACK TOUGH

GARAGE READY



PREMIUM CLEANING, SHINE & CARE PRODUCTS



AVAILABLE IN CONVENIENT 16oz & 32oz SIZES



A signature H-DNA product combining Hoosier's 65+ years of motorsports innovation with Century Chemical's 100 years of chemical excellence.

★★★★★
MADE IN USA



MANUFACTURED IN INDIANA



See The Full Line of Hoosier Daddy and Hoosier Momma Products at HoosierTire.com



TIRES DESIGNED FOR CHAMPIONS


CORPORATE HEADQUARTERS

65465 S.R. 931 • Lakeville, IN 46536 • (574) 784-3152
www.hoosiertire.com

HOOSIER RACING TIRE EUROPE

Continental Reifen Deutschland GmbH
Continental-Plaza 1 • 30175 Hannover, Germany
info_europe@hoosiertire.com

HOOSIER RACING TIRES CAN BE PURCHASED FROM ANY OF OUR WORLDWIDE DISTRIBUTORS

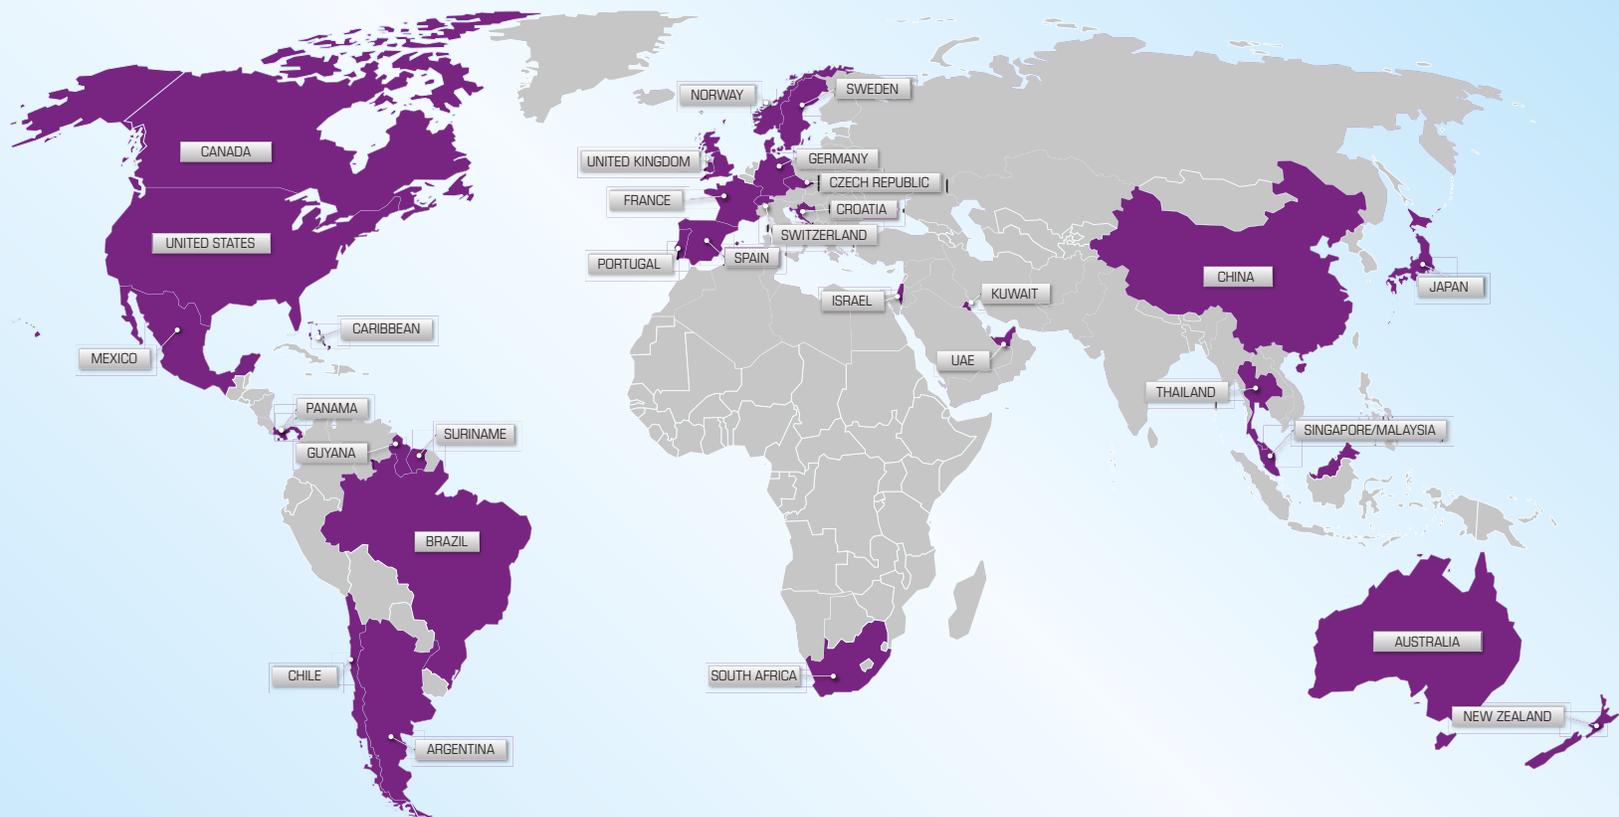

SEE THE COMPLETE LIST OF DISTRIBUTORS BY SCANNING THE QR CODES BELOW

UNITED STATES DISTRIBUTORS



INTERNATIONAL DISTRIBUTORS

